



PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>B67D 5/62</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/10171</b> <b>(43) International Publication Date:</b> 20 March 1997 (20.03.97)
<b>(21) International Application Number:</b> PCT/US96/14919 <b>(22) International Filing Date:</b> 13 September 1996 (13.09.96) <b>(30) Priority Data:</b> 08/531,568 13 September 1995 (13.09.95) US 08/615,399 14 March 1996 (14.03.96) US <b>(71)(72) Applicant and Inventor:</b> KYEES, Melvin, D. [US/US]; 16732 Intrepid Lane, Huntington Beach, CA 92649 (US). <b>(74) Agents:</b> GERARDI, Michael, M. et al.; Jeffer, Mangels, Butler & Marmaro, 10th floor, 2121 Avenue of the Stars, Los Angeles, CA 90057 (US).		<b>(81) Designated States:</b> AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>

**(54) Title:** APPARATUS FOR COOLING FLUIDS**(57) Abstract**

An apparatus (1) for cooling at least one fluid includes a coolant system (18) defining a cold plate portion (12) and a tower portion (14), a fluid system (20) in heat exchange relationship with the coolant system (18) and likewise defining a cold plate portion (36) and a tower portion (38), means for dispensing (34) at least one fluid from the tower portion, and a metallic unit comprising unitary cold plate and tower portions which respectively incorporate the cold plate and tower portions of the coolant system and the fluid system. Another embodiment includes separable cold plate and dispenser units. The cold plate unit includes a coolant system, a fluid system and a metallic unit. The coolant system defines a cold plate portion and a tower portion. The cold plate portion of the coolant system has a primary inlet manifold (24) and a primary outlet manifold (26), and the tower portion has a secondary inlet manifold and a secondary outlet manifold.

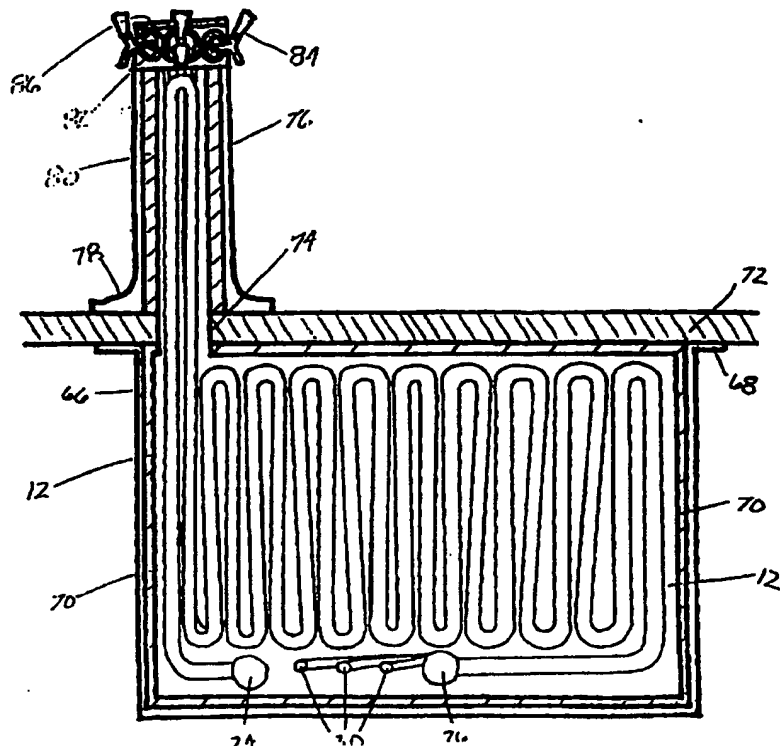

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## APPARATUS FOR COOLING FLUIDS

### Field of the Invention

The present invention relates to an improved apparatus for dispensing  
5 cooled fluids, in particular beverages such as beer.

### Background of the Invention

In most commercial establishments where beer is served, the beer is  
supplied in barrels or kegs. Beer, as herein used, refers to anyone of those  
carbonated alcoholic malt beverages that are commonly called beer, ale and  
10 stout. The kegs of beer are stored and let to cool in refrigerated cold rooms  
that are provided in most commercial establishments to store foodstuffs and  
beverages for immediate access and use. For practical reasons, the  
temperature in cold rooms must be well above freezing (32°F) and is typically  
sought to be maintained between 40°F and 45°F. Accordingly, the beer, in  
15 kegs, stored in cold rooms is cooled to between 40°F and 45°F. Under most  
favorable conditions, the beer is cooled to 40°F.

The beer that is chilled to 40°F is dispensed from normally closed  
selectively operable beer-dispensing valves, or tap heads, that are located at  
serving stations that are remote from the cold rooms. The tap heads are  
20 normally carried at the upper ends of elongate vertically extending dispensing  
towers that are mounted atop and project upwardly from bar tops or counters  
so that the tap heads occur in spaced relationship above the counters and  
such that serving glasses and the like can be conveniently positioned on the  
counters, below the tap heads, to receive beer issuing from the tap heads.

25 The beer is delivered from the kegs to the tap heads through elongate  
beer delivery lines with upstream ends that are connected with taps that are  
engaged in the kegs. The beer lines extend from the kegs and from within  
the cold rooms and extend to the dispensing stations where their downstream  
ends are suitably connected with the tap heads.

30 The beer lines are most often established of 3/8"-ID plastic tubing that  
is especially formulated and approved for handling alcoholic beverages. The  
beer lines vary in length from about 15' or 20' to in excess of 100'. The

downstream ends of the beer delivery lines connect with the upstream ends of equalizer or balance lines made of similar plastic tubing but which is smaller in inside diameter than the beer lines; For example, the balance lines are established of 1/4"-ID tubing. The balance lines vary in length between 9' and 15'. Typically, the downstream ends of the balance lines connect with the upstream ends of 1/4"-ID stainless steel connector tubes that project from the lower ends of the towers and that extend up through the towers and connect with the tap heads via tap fittings affixed in the upper ends of the towers.

In practice, beer is driven and caused to move from the kegs through the beer lines and to the tap heads by gas pressure. To this end, suitable high-pressure motive gas supplies are provided to introduce gas under desired pressure, into the kegs. The motive gases most commonly used are air, carbon dioxide, nitrogen, and combinations of those gases. The gases are most commonly provided in compressed gas cylinders that are stored in the cold rooms and are conducted from the cylinders into the kegs, to the taps, through gas lines. Pressure regulators are provided in the gas lines to control the pressure of the gas in the kegs. Due to friction losses in the systems, the pressure at which the gases are introduced into the kegs is adjusted and set so that beer dispensed from the tap heads flows at a set desired rate. The usual rate at which beer is dispensed from the tap heads is between 1 and 2 ounces per second.

When the gas (CO<sub>2</sub>) that is entrained in beer is let to caused to separate from the beer, it creates foam composed of gas-filled bubbles of beer. When beer is dispensed into a serving glass, the foam generated by the escape of gas is seen to rise to the top of the beer. The foam is rather stable and is such that it breaks down at such a slow rate that it must often be directed to waste by letting it overflow and/or pouring it off from the glasses in which the beer is to be served. If beer is not properly handled, in excess of 50% of the beer can be lost to waste, in the form of foam.

The gas that is entrained in beer imparts into the beer that tongue- and palate-stimulating sensation that consumers of beer desire and that is sometime called its "life." As gas escapes from beer and is carried away in

the form of foam, the beer loses its "life" and becomes what is referred to as "flat" and unpalatable, at a rapid rate. Thus, beer in a glass containing a large volume of foam is likely to have lost so much gas that it is flat and of inferior character, if not unmerchantable.

5       The gas in beer is quite unstable and is such that if let or caused to rapidly expand, as result of rapid thermal heating of the beer or as a result of a rapid reduction of pressure on the beer, it will immediately reach or attain a highly excited state in which adjacent expanding bubbles of beer displace the liquor of the beer and continue to establish ever-increasing larger bubbles of  
10       gas that cannot be contained by and that seek to escape or separate from the beer. Once the above gas-separating process starts and/or is put into motion, it does not stop immediately when the temperature and/or pressure on the beer becomes stabilized, but continues until the kinetic energy created by the process is spent and the beer returns to a suitable quiet state.

15       As the temperature of beer is lowered, the gas entrained therein contracts and becomes more stable and less likely to separate from the beer. Accordingly, it desirable to chill beer to as low a temperature (above freezing) as possible when it is dispensed.

      The above-noted gas-release process resulting from rapid rises in  
20       temperature and/or rapid drops in pressure will also occur at any temperature, though the severity of the process decreases as the temperature of the beer is decreased.

      Furthermore, beer stored in kegs is maintained under pressure to maintain the gas compressed and entrained in the beer. When the pressure  
25       on the beer is suddenly released or reduced, as when the tap heads are opened, the gas entrained therein is let to expand and the above-noted gas-releasing process is set into motion. When the tap heads in beer-dispensing systems of the nature and character referred to above are opened, the pressure on the beer, immediately downstream from the tap heads, is released  
30       and the gas entrained in the beer commences to release. The foregoing results in the beer being driven or blasted through and out of the tap heads with and by the gas released immediately downstream thereof.

      As a result of the foregoing, the prior art has resorted to the provision

and use of the above-noted balance lines. The balance lines, which are smaller in inside diameter than the beer delivery lines, function to cause the drop in pressure that occurs when the tap heads are open to occur in the downstream end portions of the beer delivery lines. The balance lines are of sufficient length so that as the beer and free gas (that is released in the beer lines) enters the upstream ends thereof and continues to flow therethrough it become sufficiently quiet so that the freed gas is reabsorbed by the beer by the time the beer reaches and flows through and from the tap heads. While the noted balance lines are effective to eliminate or greatly reduce those adverse effects that result from a rapid release of pressure on beer, they have little or no effect in preventing the adverse effects that result from progressive warming of the beer and expansion of the gas contained therein.

As a result of the foregoing, while the provision and use of the above-noted balance lines attains beneficial end results, they are not wholly effective to prevent the escape of gas from beer flowing therethrough and the generating of excess foam that is discharged through and from the tap heads with the beer that is dispensed. Foam typically accounts for as much as 25% of the total volume of beer dispensed by means of presently known dispensing systems. This represents a significant loss of product.

The portions of the beer lines that extend from the cold rooms to the dispensing stations and the balance lines, connecting tubes and tap heads are exposed to the ambient temperatures of the establishments in which the beer-dispensing systems are installed. Accordingly, though the beer might be cooled to 40°F when it enters the beer lines, it will (if not maintained cooled) warm and heat to temperatures beyond which the beer can be satisfactorily dispensed. To this end, the prior art has resorted to the provision and use of what the art refers to as "glycol machines or systems" that serve to prevent excess warming of beer as it flows through beer-dispensing systems.

The above-referred to glycol systems typically include refrigerated glycol heat exchanger units and in which a glycol (anti-freeze) solution is chilled. The systems next include an elongate glycol delivery lines with an upstream end that connects with the heat exchanger unit and that extend longitudinally of the beer lines in heat-conducting contact therewith; and a glycol return line

continuing from the downstream ends of the glycol delivery line and that extend longitudinally of the beer lines, in heat-conducting contact therewith and that has a downstream end that connects with the heat exchanger unit. Pump means are included to cause the glycol solution to continuously  
5 recirculate through the glycol lines and the heat exchange unit. The related beer lines and glycol lines are contained within an elongate thermal-insulating jacket structure. The assembled beer and glycol lines and the thermal-insulating jacket establish what is commonly referred to as a "trunk line."

10 In practice, the glycol delivery and return lines are commonly extended to run parallel with and adjacent to the balance lines.

The glycol lines are established of the same plastic tubing as the beer delivery lines and balance lines.

While the above-noted glycol systems would appear to establish good and effective heat exchanger means that would work to prevent warming of  
15 beer flowing through the beer lines and balance lines, they do not prevent warming of the beer but simply slow the rate at which the beer warms as it flows from the kegs to the tap heads. This is due to the fact that the plastic tubing of which the several lines are established has an extremely low coefficient of heat conductivity. Further, while the glycol lines are in contact  
20 with the beer-conducting lines, that contact seldom amounts to more than thin line contact. Further, due to space limitations and the like, the thermal-insulating jackets used in trunk lines are not so efficient a barrier of heat to prevent more heat from entering the trunk lines and reaching the beer delivery lines than can be carried away by the glycol flowing through the glycol lines.

25 As a result of the foregoing, when, for example, glycol chilled to 25°F is conducted through 200' of glycol line in a 100' long trunk line and beer, at 40°F, is conducted through a related 100' of beer line within that trunk line, the temperature of the glycol, as it is returned to the glycol heat exchanger, is likely to be warmed to 27°F or 28°F and the beer, at the downstream end of  
30 the beer line is likely to be warmed to an excess of 45°F. Accordingly, the noted glycol systems work to notably slow the rate at which beer warms as it flows through related beer lines, it does not chill the beer and does not prevent warming of the beer. That warming of the beer that does take place

and results in expansion of the gas entrained in that beer to render the gas highly unstable and very likely to commence to separate from the beer.

The above-noted warming of beer as it moves through the noted trunk lines is accelerated somewhat as it advances through related balance lines to  
5 tap heads. This further destabilizes the gas in the beer and renders it such that when the tap heads are opened, and the pressure on the beer is released, gas commences to escape from the beer, generating foam which is dispensed from the tap heads together with that beer which is not foamed.

The prior art has resorted to the provision and use of high efficiency  
10 heat exchangers connected with and between the downstream ends of the beer delivery lines and the upstream ends of related balance lines and through which chilled glycol is conducted to chill and reduce the temperature of the beer from, for example, 40°F to 30°F. The beer chilled to 30°F is then conducted into and through the balance lines and thence through and from  
15 the tap heads. When chilled to 30°F as noted above, the gas in the beer is considerably more stable than it was when the beer was 40°F. However, the beer is allowed to warm two or three degrees as it advances through the balance lines. The gas expands accordingly, resulting in gas escape and foam generation. The amount of foam that is generated under such circumstances  
20 is denser or less in volume and is colder, but it is nonetheless generated.

The most effective and efficient heat exchangers referred to in the foregoing are cold plate type heat exchangers that include cast aluminum bodies with stainless steel beer- and glycol-conducting coils therein that are suitably connected with the beer and balance lines and with the glycol  
25 delivery and return lines. The aluminum bodies are suitably jacketed with thermal insulation to block the entry of ambient heat (72°F) into the bodies.

Other chilling means for lowering the temperature of beer before it is conducted into and through balance lines in beer-dispensing systems have included common refrigerated bath-type chillers. Those heat exchangers have  
30 proven to be notably less efficient and effective than the above-noted cold plate type heat exchangers.

In another beer-dispensing system provided by the prior art, the balance lines are established of stainless steel and are arranged within compartments



or chambers within related dispensing tower structures mounted atop counters and that carry the tap heads. The chilled glycol of related glycol systems is circulated in and through the chamber and about the balance lines to chill the beer within and flowing through the balance lines to the tap heads.

5 While this form of heat exchange means is effective to chill beer that is let to stand in the balance lines, the glycol is incapable of carrying off heat from the beer (through the walls of the balance lines) at a sufficient rate to notably chill beer that is continuously flowing through the balance lines at a rate of, for example, 4 ounces per second.

10 As a result of the above, the first-to-be-served beer (that has been let to stand and to chill in the balance lines) is suitably chilled. Thereafter, as the chilled beer is dispensed and new and warm beer enters the balance lines to replace it, the temperature of the beer being dispensed warms at a notable rate and the dispensing of the beer must be delayed after each serving of beer  
15 has been dispensed, if beer, at the desired low temperature, is to be served.

In addition to the above, when warm beer enters the balance lines in the last-noted heat exchanger means and combines with previously chilled beer in the balance lines, a portion of the chilled beer is warmed by the incoming beer. When that chilled beer is thus warmed, the gas therein expands and the  
20 previously noted gas release process takes place. As a result of the foregoing, when beer is dispensed from systems including the last-noted form of heat exchanger means, the beer dispensed is seldom uniform, that is, it intermittently runs clear and free of foam and then runs laded with foam for short periods of time.

25 The foregoing problems are also attendant to a greater or lesser extent in connection with dispensing other beverages, such as wine, soft drinks, fruit juices, etc., as well as generally with dispensing any type of fluid which is desired to be chilled.

Additional problems arise in situations in which very large quantities of  
30 beverages must be dispensed, and in situations in which it is impossible or impractical to store beverages in volume, such as kegs of beer, in a low-temperature environment prior to dispensing the beverage. In the latter situation, it is sometimes the case that kegs of beer or other bulk beverages

are stored at ambient temperature rather than in a cold room. In either event, additional beverage cooling capacity is needed to cool the beverage to a commercially desirable dispensing temperature.

5 A need exists for an improved apparatus for dispensing cooled fluids, in particular beverages such as beers, soft drinks, etc., which is capable of dispensing the cooled fluid at a rapid rate without the need for pausing between portions.

10 A need also exists for an improved apparatus for dispensing cooled carbonated beverages which is capable of reducing or substantially eliminating foam formation in the dispensed beverages.

A need also exists for an improved apparatus for dispensing cooled liquids which includes separable components that can be separately manufactured and installed.

15 There is also a need for an apparatus that can be mounted entirely on a surface such as a countertop.

There is a further need for an apparatus that is capable of delivering very high volumes of cooled liquids.

A need also exists for an apparatus that is capable of dispensing liquids that are supplied to the apparatus at ambient temperatures.

20 Summary of the Preferred Embodiments

In accordance with one aspect of the present invention, there is provided an apparatus for cooling at least one fluid comprising: a coolant system defining a cold plate portion and a tower portion; a fluid system  
25 defining a cold plate portion and a tower portion, the respective portions being in heat exchange relationship with the corresponding portions of the coolant system; means for dispensing the at least one fluid from the tower portion; and a metallic unit including unitary cold plate and tower portions which respectively incorporate the cold plate and tower portions of the  
30 coolant system and the fluid system.

In a preferred embodiment, the said coolant system comprises inlet and outlet manifolds, and a plurality of coolant lines connecting the inlet and outlet manifolds.

The metallic unit is preferably at least partially insulated, and preferably both the cold plate portion and the tower portion are insulated. Preferably, the cold plate portion is contained within a shell, in particular a flanged shell which permits easy installation in a commercial setting such as a bar, counter, etc. The tower portion preferably is enclosed within a tower sheath.

The inventive apparatus is easy to install in the desired location, being in one combined unit rather than in several sub-units as typically is the case in known beverage cooling apparatus. Furthermore, only one coolant inlet line and one coolant outlet line are required, rather than multiple coolant lines, reducing the required amount of coolant line insulation and attendant installation time and expense. Fluid lines between separate cold plate and tower units are eliminated, further reducing installation time and cost.

The inventive apparatus is capable of dispensing any fluid, particularly any beverage, at a desired service temperature, preferably at a temperature below 32°F, with substantially no foam formation, particularly in beers. Use of the inventive apparatus thus reduces product loss and enhances revenue to the beverage vendor. Soft drinks can be dispensed without the need for ice cooling, as is typically the case with known soft drink dispensing systems.

Another advantage of the present invention is that cooling of the fluids occurs immediately before the point at which the fluids are dispensed, rather than at an intermediate location from which the fluids must subsequently be transferred. Thus, potential reheating of cooled fluids is avoided.

The cold temperatures afforded by the present invention also help reduce yeast activity and growth, which reduces the service requirements for beer dispensing. That is, beer lines according to the invention require less frequent cleaning due to the reduced yeast growth, typically every 3-4 weeks rather than every week as is presently the case with known beer dispensing apparatus. This represents a significant saving in cleaning expense and down time.

In accordance with another aspect of the present invention, there is provided a cold plate unit that includes a coolant system, a fluid system and a metallic unit. The coolant system includes a primary inlet manifold, a secondary inlet manifold, a secondary outlet manifold and a primary outlet manifold, and further includes a first plurality of coolant line segments connecting the primary inlet manifold and the secondary inlet manifold and a second plurality of coolant line segments connecting the secondary outlet manifold and the primary outlet manifold. The fluid system is in heat exchange relationship with the coolant system. The metallic unit incorporates the coolant system and the fluid system.

In a preferred embodiment of the cold plate unit, the coolant system defines a cold plate portion and a tower portion, the cold plate portion including the primary inlet manifold and the primary outlet manifold and the tower portion including the secondary inlet manifold and the secondary outlet manifold. The fluid system defines a cold plate portion and a tower portion, the portions being in heat exchange relationship with the coolant system. The metallic unit includes unitary cold plate and tower portions which respectively incorporate the cold plate and tower portions of the coolant and fluid systems.

In accordance with still another aspect of the present invention, there is provided a dispenser unit which also includes coolant and fluid systems and a metallic unit. The coolant system includes a dispenser inlet manifold and a dispenser outlet manifold, and further includes a plurality of coiled coolant lines. The fluid system is in heat exchange relationship with the coolant system, and is disposed at least partially within the coiled coolant lines. The metallic unit incorporates the coolant and fluid systems.

The dispenser unit can be employed by itself as a complete liquid cooling device, or can be used together with one or more additional cold plate units of the invention to form a multi-unit system. The dispenser unit can have any desired orientation (i.e., vertical, horizontal, inclined) and any desired shape, including a cube, a rectangular prism, a cylinder, etc. The coiled coolant and fluid lines can be formed as square or rectangular coils, circular coils, or any other desired configuration.

Preferably, the fluid system includes at least one restricter segment. In another preferred embodiment, the fluid system includes a plurality of fluid lines each at least partially disposed within the coiled coolant lines. At least one of the fluid lines preferably includes a restricter segment.

5 In accordance with a further aspect of the present invention, there is provided an apparatus for cooling a fluid which includes a cold plate unit and a dispenser unit as described above. Preferably, the cold plate and dispenser units further include fittings adapted to enable the engagement of the respective coolant and fluid systems of the two units.

10 In accordance with yet another aspect of the present invention, there is provided a cold plate unit that includes a coolant system and a fluid system in heat exchange relationship, and a metallic unit. The coolant system has primary inlet and outlet manifolds and a plurality of coolant lines each including a plurality of loops. The fluid system includes at least one fluid line  
15 preferably also including a plurality of loops, and preferably is interleaved with the coolant lines. The metallic unit incorporates the coolant and fluid systems.

In preferred embodiments, the foregoing cold plate is employed together with a dispenser unit as described herein, or with an apparatus for cooling a  
20 fluid as described herein. The latter embodiment is of particular advantage when used to dispense fluids that are initially supplied at ambient temperature, or to dispense large volumes of cooled fluids. The cold plate acts as a pre-chiller to cool the liquid to a temperature between ambient and the desired dispensing temperature, while the dispenser unit or the apparatus  
25 further complete the cooling of the fluid to the desired dispensing temperature.

The inventive apparatus is capable of dispensing any fluid, particularly any beverage, at a desired service temperature, preferably at a temperature below 32°F, with substantially no foam formation, particularly in beers. Use  
30 of the inventive apparatus thus reduces product loss and enhances revenue to the beverage vendor. Soft drinks can be dispensed without the need for ice cooling, as is typically the case with known soft drink dispensing systems.

Another advantage of the present invention is that cooling of the fluids

occurs immediately before the point at which the fluids are dispensed, rather than at an intermediate location from which the fluids must subsequently be transferred. Thus, potential reheating of cooled fluids is avoided.

The cold temperatures afforded by the present invention also help  
5 reduce yeast activity and growth, which reduces the service requirements for beer dispensing. That is, beer lines according to the invention require less frequent cleaning due to the reduced yeast growth, typically every 3-4 weeks rather than every week as is presently the case with known beer dispensing apparatus. This represents a significant saving in cleaning expense and down  
10 time.

Other objects, features and advantages of the present invention will become apparent to those skilled in the art from the following detailed description. It is to be understood, however, that the detailed description and specific examples, while indicating preferred embodiments of the present  
15 invention, are given by way of illustration and not limitation. Many changes and modifications within the scope of the present invention may be made without departing from the spirit thereof, and the invention includes all such modifications.

#### Brief Description of the Drawings

20 The invention may be more readily understood by referring to the accompanying drawings in which

FIGS. 1-2 are front and right side elevational views, respectively, of an embodiment of the metallic unit of an apparatus according to the invention showing the unitary tower and cold plate portions and the positions of the  
25 coolant primary inlet and outlet manifolds, fluid line inlets and tap fittings.

FIG. 3 is a front cutaway view of the embodiment of FIG. 1 showing the positioning of a coil basket including the coolant and fluid lines within the metallic unit.

FIGS. 4-5 are a bottom plan view and a left profile view, respectively, of  
30 the coil basket including the coolant and fluid systems of the embodiment of FIG. 1. Flows are shown by arrows.

FIG. 6 is a front cutaway view of a coolant line of FIG. 1 in isolation, showing its disposition within the metallic unit.

FIG. 7 is a front cutaway view of a fluid line of FIG. 1 in isolation, showing its disposition within the metallic unit and its connection to the tap fitting in the tower portion of the metallic unit.

FIG. 8 is a front cutaway view of an embodiment of the invention including the metallic unit of FIG. 1 disposed within and through in a surface such as a countertop, in which the cold plate portion of the metallic unit is insulated and encased within a flanged casing, the tower unit is insulated and encased within a tower shield, and tap heads are affixed to the fittings.

FIGS. 9a-c are back, front and side views of a preferred tap fitting employed in the embodiment of FIG. 1.

FIG. 10 is a back elevational view of an alternative embodiment of a cooling apparatus of the invention including an external fluid line a portion of which is affixed to a surface of the cold plate portion of the metallic unit.

FIGS. 11a-c are left partial sectional, top plan and right partial sectional views of an embodiment of a separate cold plate unit of the invention which includes cold plate and tower portions. The embodiment is adapted for vertical placement.

FIGS. 12a-b are left partial sectional and top plan views of another embodiment of a separate cold plate unit of the invention which does not include a tower portion.

FIG. 13 is a right perspective view of the coil basket of an embodiment of a dispenser unit of the invention having one coiled fluid line disposed at least partially within a coiled coolant system. The fluid line includes a restrictor segment.

FIGS. 14a-b are right perspective views of the coil basket of another embodiment of a dispenser unit of the invention having four fluid lines disposed at least partially within a coiled coolant system, wherein the fluid lines are not coiled but include restrictor segments. FIG. 14a illustrates the coil basket, while FIG. 14b shows a complete unit including metallic unit, insulation, covering and tap heads.

FIGS. 15a-b show a cylindrical, or tower, dispenser unit coil basket and a partial cut-away view of a complete cylindrical unit, respectively.

FIG. 16 is a left perspective view of another embodiment of an

alternative cold plate unit of the invention in which a plurality of fluid line inlets and outlets are disposed between coolant system inlet and outlet manifolds. The cold plate is adapted for horizontal placement.

FIG. 17 is a schematic representation of a liquid cooling system which  
10 employs a cooling apparatus, including cold plate and dispenser unit, of the invention.

FIG. 18 is a schematic representation of another liquid cooling system which includes an integral cold plate unit of the invention together with an additional cold plate upstream of the apparatus for additional cooling capacity.

15 FIG. 19 is a schematic representation of a third liquid cooling system which includes a cooling apparatus of the invention together with an additional upstream cold plate.

FIGS. 20-22 are schematic representations of alternative liquid cooling systems, corresponding to FIGS. 17-20, respectively, which include a pre-chill  
20 unit and which are useful for cooling liquids, such as beer, stored at ambient temperature.

In the figures, like elements are labeled alike throughout.

#### Detailed Description of the Preferred Embodiments

With reference to FIGS. 1 and 2, an embodiment 1 of a fluid cooling  
25 apparatus of the invention (hereinafter an "integral unit") includes a metallic unit 10 comprising cold plate portion 12 and tower portion 14 which is formed integrally with cold plate portion 12 by casting, as described in detail below. Cold plate portion 12 preferably has the shape of a flat, rectangular plate. Tower portion 14 preferably has the shape of a cylinder. Other shapes  
30 can also be employed if desired.

Disposed within metallic unit 10, as shown in FIG. 3, is coil basket 16. Coil basket 16 includes coolant system 18 and fluid system 20. Coolant system 18 comprises a plurality of coolant lines 22 extending between



primary inlet manifold 24 and primary outlet manifold 26. Fluid system 20 comprises at least one fluid line 28, preferably a plurality of fluid lines 28.

Each fluid line 28 has fluid inlet 30 and outlet end 32 which is affixed to a tap fitting 34. The coolant lines 22 and at least one fluid line 28 are  
5 arranged in heat exchange relationship. By "heat exchange relationship" is denoted a spatial configuration such that heat can flow between at least one fluid line and at least one coolant line. Preferably, the fluid line(s) and coolant lines are arranged in countercurrent flow relationship.

Preferably, the fluid lines 28 are interleaved between the coolant lines  
10 22 as shown in FIGS. 4-5. The number of coolant lines thus preferably is at least one greater than the number of fluid lines. For example, when the fluid system includes three fluid lines, the coolant system preferably includes four coolant lines, and the lines are arranged in an alternating manner such that each fluid line is disposed between two coolant lines.

15 The coolant system 18 defines a cold plate portion 36 and a tower portion 38 which are disposed within corresponding cold plate portion 12 and tower portion 14 of metallic unit 12, respectively. Tower portion 38 is defined by a portion of at least one coolant line 22, preferably by corresponding portions of at least two coolant lines 22. Tower portion 38  
20 comprises upper portion 40 of tower coolant loop 42 of coolant line 22. Tower coolant loop 42 is connected at inlet end 44 to primary inlet manifold 24 and includes a short horizontal section 25 which turns at bend 27 and extends vertically to tower bend 46 and subsequently downward to cold plate end 48.

25 At cold plate end 48, tower coolant loop 42 merges with a first of a plurality of cold plate coolant loops 50 of coolant line 22. The number of coolant loops typically ranges from 5 to 20. In the preferred embodiment of FIG. 6, 9 coolant loops are employed. Together with lower portion 52 of tower coolant loop 42, cold plate coolant loops 50 partially define cold plate  
30 portion 36 of coolant system 18.

In embodiments in which one or more coolant lines 22 do not include tower coolant loops 42 (i.e., do not serve to partially define tower portion 38), such coolant lines include only a plurality of cold plate coolant loops 50

connected at respective inlet ends 44 to primary inlet manifold 24. Such lines include one more cold plate coolant loop 50 than the coolant lines which partially define tower portion 38, the additional cold plate coolant loop 50 corresponding to tower coolant loop(s) 42.

- 5        Preferably, from one to four coolant lines 22 include tower coolant loops 42. The number of tower coolant loops 42 is determined by the cooling requirements of tower portion 14. An excessive number of tower coolant loops 42 may cause the tower portion 14 to freeze.

- 10        The plurality of cold plate coolant loops 50 in each coolant line 22 include outlet bend 51 leading to horizontal outlet section 52 with outlet end 54 which is connected to primary outlet manifold 26.

- 15        In a preferred embodiment of coolant system 18 illustrated in FIG. 6, each coolant line 22 includes horizontal inlet section 25 and horizontal outlet section 52 connected to the primary inlet and outlet manifolds, respectively.
- 15        If desired, coolant lines 22 can be configured to extend vertically from primary inlet manifold 24 and to primary outlet manifold 26, i.e., to omit the horizontal inlet and outlet sections.

- 20        The primary inlet and outlet manifolds 24 and 26 are sized such that an adequate flow of coolant, such as chilled glycol, can flow through the coolant system 18. Preferably, the primary inlet and outlet manifolds have diameters ranging from about 0.5 to 1 inch, particularly about 0.5 inch. Typical manifold lengths range from about 3 to 5 inches. The lengths of the primary inlet and outlet manifolds are determined according to routine design factors such as the thickness of the coil basket 16 employed, the desired thickness of
- 25        the cold plate portion 12 of the metallic unit, etc.        The cooling lines 22 preferably have diameters ranging from about 0.25 to 0.5 inch, more preferably about 0.3125 inch (5/16 inch). The number of coolant lines 22 employed will vary depending on design choices such as the thickness of the cold plate portion 12, which in turn is influenced by the types and quantities
- 30        of fluids, such as beer or other beverages, which it is desired to cool. The thicker the plate, the greater the quantity of fluid that can be cooled. Thicker plates also allow cooling of multiple different types of fluids, such as beer, wine and/or other carbonated beverages such as soft drinks, at the same

time. The number of coolant lines will typically vary between 2 and 12, more preferably 2 and 8, and typically 3-4.

The coolant lines 22 and primary inlet and outlet manifolds 24 and 26 preferably are formed from stainless steel, such as "304" (commercially available from Oakley Tubing, Denver, CO). Stainless steel is particularly preferred because it is capable of withstanding contact with molten metal, such as molten aluminum or aluminum alloys, which are preferably used to form the metallic unit according to the invention (as described below), without melting, deforming or reacting with the molten metal. Other metals which are similarly resistant, e.g., tungsten, titanium, noble metals, etc., can also be used if desired to form the coolant lines and manifolds.

The coolant lines 22 preferably are connected to the primary inlet and outlet manifolds 24 and 26 by welding. Welding is preferred in order to minimize the occurrence of leakage within the cold plate portion 12 at the joints between coolant system components.

The bend radius of each coolant loop, and the spacing thereof, are matters of routine design choice depending of factors such as the desired size and shape of the cold plate portion, the type of tube bending equipment and the tube bending process employed, etc. In a preferred embodiment using 5/16 inch tubing for the coolant lines 22 and 9 coolant loops, a bend radius of about 0.531 inch is beneficial.

In forming the bends in the coolant lines 22, it is preferred to form coolant loops 50 that bend by 180°, i.e., that have parallel legs. Subsequently, the coolant lines 22 can be compressed laterally to reduce the spacing between adjacent loops, as shown in FIG. 6. Alternatively, the coolant lines 22 can be left uncompressed, i.e., with all legs parallel to each other.

In a preferred embodiment, fluid system 20 includes one or more, preferably at least two, fluid lines 28. The fluid lines 28 are not manifolded, in contrast to the coolant lines 22, but preferably are interleaved between coolant lines 22 in an alternating manner as discussed above and as shown in FIG. 4. This permits the simultaneous cooling of a plurality of different fluids simultaneously, each fluid flowing through a different fluid line 28.

Alternatively, the quantity of a single fluid to be cooled can be increased by the use of multiple separate fluid lines 28.

5 The fluid system 20 defines a cold plate portion 54 and an end segment 56. Cold plate portion 54 includes fluid inlet segment 58 within which fluid inlet 30 is defined. Preferably, fluid inlets 30 are adjacent coolant primary outlet manifold 26 (i.e., fluid system 20 and coolant system 18 are in a countercurrent flow relationship). Fluid inlet segment 58 in turn joins with a plurality of cold plate fluid loops 60. Preferably, the number, spacing and configuration of cold plate fluid loops 60 correspond to those of cold plate coolant loops 50, i.e., the shapes of the coolant and fluid lines are similar. 10 Such a configuration enhances heat transfer between the fluid and coolant lines.

The last of said plurality of cold plate fluid loops 60 in turn joins with end segment 56. End segment 56 extends vertically through cold plate 15 portion 12 of metallic unit 10 and connects at outlet end 32 to means for dispensing a fluid from fluid line 28 as shown in FIG. 7. In a preferred embodiment, outlet end 32 is connected to tap fitting 34, illustrated in FIGS. 9a-c. Preferably, outlet end 32 is welded to tap fitting 34.

End segment 56 preferably extends between tower coolant loops 42. 20 Multiple end segments 56 of fluid lines 28 can extend between a smaller number of tower coolant loops 42. For example, three end segments 56 of separate fluid lines 28 can extend between two tower coolant loops 42 of coolant lines 22, with additional coolant lines 22 omitting tower coolant loops as discussed above.

25 Fluid lines 28 preferably have diameters ranging from 0.25 to 0.5 inch, particularly 5/16 inch. In a preferred embodiment, a fitting, such as a barb fitting, is welded to fluid lines 28 at fluid inlets 30. Typical, 1/4 inch to 3/4 inch barb fittings are employed. For a 5/16 inch line, a 3/8 inch barb fitting is beneficially employed. Similar barb fittings can be employed with the coolant 30 primary inlet and outlet manifolds. The use of such fittings is well known in the art, and is illustrated, for example, in U.S. Patent Application Serial No. 08/394,910, filed 27 February 1995. External coolant and fluid lines can easily be connected to the inventive apparatus by means of such barbed

fittings, as is well known to those skilled in the art.

An exemplary embodiment of the inventive apparatus includes a coolant system having 1/2 inch primary inlet and outlet manifolds with 1/2 inch barb fittings. Three coolant lines of 5/16 inch diameter extend between the  
5 primary inlet and outlet manifolds. Two fluid lines of 5/16 inch diameter, with 3/8 inch barb fittings, are interleaved between the coolant lines.

In a preferred embodiment, fluid lines 28 include restrictor segments 64. Restrictor segments 64 preferably comprise end segments 56, and preferably also include portions of at least one cold plate fluid loop 60, as shown by the  
10 dotted line in FIG. 7. Restrictor segment 64 has a diameter smaller than the diameter of the remainder of fluid line 28, and preferably is affixed to the remainder of fluid line 28 by welding. Diameter reduction is typically about 1/16 inch. Selection of the diameter of the restrictor section is a matter of routine design choice. A preferred length for the restrictor segment is  
15 between about 7 and 9 feet. The reduction in line diameter serves to compress the fluid flowing through fluid line 28. Restrictor segment 64 thus affords additional foam reduction in carbonated beverages, particularly beers, which are dispensed from the inventive apparatus.

Metallic unit 10 preferably is comprised of aluminum or an aluminum  
20 alloy. Typical useful aluminum alloys include 99.7% Al (P-10/20), as well as A356 or the like. Other metals, such as copper lead, or brass, could also be used, but such metals must be compatible with the materials used to form the coolant and fluid systems, and preferably have thermal conductivities similar to that of aluminum.

25 The metallic unit 10 is preferably formed by a standard "permanent molding" casting process. In an exemplary process, aluminum or a selected aluminum alloy is smelted in a smelting furnace. Meanwhile, a preassembled coil basket 16 is placed in a mold having the desired shape of the metallic unit. Preferably, tap fittings 34 are connected to the outlet ends 32 of the  
30 fluid lines 28 of coil basket 16 prior to placement of the coil basket into the mold. Incorporating the tap fittings 34 directly into the top of the tower portion of the metallic unit has the advantage of maintaining the chilled fluid at the desired temperature until it enters the tap heads to be dispensed.

Furthermore, when tap heads are connected to the incorporated tap fittings, condensation occurs on the the tap heads at and near the point of connection, conferring an attractive appearance to the tap heads.

5 The mold is clamped shut, and the aluminum or alloy is ladled out from the smelting furnace into the mold. The casting temperature is approximately 1400°F. Once cast, the aluminum solidifies around the coil basket 16.

10 The solidified metallic body 10 is subsequently removed from the mold, excess aluminum is removed and recovered for recycling, and the metallic unit is cooled to ambient temperature. Finally, the metallic unit 10 is pressure tested for leaks, and passivated to de-scale deposits, particularly iron oxide, from the interior of the coolant and fluid lines, using a standard process such as flowing a nitric/phosphoric acid mixture through the coolant and fluid lines. The unit is then ready for installation, as discussed below.

15 FIG. 8 illustrates an apparatus of the invention installed in a bar, counter top or other surface. Cold plate portion 12 of metallic unit 10 of the apparatus is disposed within shell 66 having flange 68. Cold plate portion 12 can optionally be wrapped with an insulating reflective material as is known in the art. Between cold plate portion 12 and shell 66 is a layer of insulation 70. Preferably, the layer of insulation 70 is formed by injecting or pouring a liquid material into the space between cold plate portion 12 and shell 66 and hardening the liquid material to form a foam insulating material. Other types of insulation, such as sheets of foam material (e.g., urethane foam) can be inserted between cold plate portion 12 and shell 66 if desired. Injection of a liquid material is preferred because is affords a uniform and uninterrupted body of insulation that effectively prevents the condensation and accumulation of moisture within the structure that might otherwise adversely affect its thermal-insulating characteristics and result in premature degradation of the structure, as often occurs when other kinds of insulating materials are used.

30 Cold plate portion 12 is secured in place by affixing flange 68 to the underside of bar countertop 72, for example by bolts.

Tower portion 14 of metallic body 10 projects through an opening 74 in bar countertop 72. Tower portion 14 optionally is also wrapped with an

- insulating, reflective material, and a tower sheath 76 is disposed around tower portion 14 and affixed to the upper side of bar countertop 72, by screws, bolts or other conventional means, for example via integral collar 78. The space between tower portion 14 and tower sheath 76 preferably is also
- 5 filled with a layer of insulation 80 similar and formed similarly to layer 70. Tower sheath 76 has defined at its top end a plurality of openings 82 which correspond to tap fittings 34 in tower portion 14. These openings 80 are aligned with the tap fittings 34, and tap heads 84 are connected to tap fittings 34. Tower sheath 76 is closed by cap 86.
- 10 With FIG. 8 in view, a preferred procedure for preparing and installing an apparatus of the present invention in a desired setting, such as a counter or bar, includes the following steps. The cold plate portion of the metallic unit optionally is first wrapped with an insulating, reflective material. The wrapped cold plate portion is next placed within a shell, preferably a flanged
- 15 shell as described herein. A foam insulation material is then injected into the space between the wrapped cold plate portion and the shell, and the insulation is hardened. If desired the shell can be removed. Preferably, however, the shell is retained about the insulated cold plate portion of the metallic unit.
- 20 The partially insulated metallic unit is then mounted by extending the tower portion of the metallic unit through an opening which has been defined through the counter, bar or other surface. The insulated cold plate portion is affixed beneath the surface. If the shell, preferably the flanged shell, has been retained, the insulated cold plate portion can be affixed to the underside
- 25 of the surface via the flange. The protruding tower portion of the metallic unit optionally is first wrapped with an insulating, reflective material as described above with respect to the cold plate portion. A tower sheath is then disposed about the tower portion and affixed to the upper side of the counter, bar or other surface. Next, tap heads are installed in the various tap
- 30 fittings in the top of the tower portion through aligned openings in the tower sheath. Foam insulation is injected into the space between the tower sheath and the tower portion and hardened. Finally, the tower portion is capped.

To operate the inventive apparatus, a source of coolant, such as a

conventional glycol chilling unit, is connected to the primary inlet and outlet manifolds of the coolant system of the apparatus. Sources of fluids to be chilled, preferably beverages such as beer, wine or soft drinks which are pre-chilled, e.g., to a temperature of about 45°F, are connected to the inlets of the fluid lines of the apparatus. Fluids which are not pre-chilled can also be dispensed from the inventive apparatus. A flow of coolant, such as glycol, is established through the coolant system of the apparatus, and the beverages or other fluids to be cooled are introduced into the fluid system of the apparatus, with the coolant flow being counter to the fluid flow as discussed above. Cooled fluids are subsequently dispensed from the tap heads. For example, beer is dispensed at a temperature from about 30 to 32°F, at a flowrate of four 16 oz. servings per minute, or up to four oz. per second, with substantial elimination of foaming. Beer temperatures at the tap as low as 27°F can be achieved by use of the inventive apparatus.

FIG. 10 illustrates an alternative embodiment of an apparatus of the invention which includes an external fluid line 86. External fluid line 86 is affixed to a surface, such as the front surface, of cold plate portion 12 and tower portion 14 of metallic unit 10, and is connected to one of tap fittings 34. This embodiment allows fluids having various and potentially incompatible chilling requirements to be dispensed from the same unit. For example, a fluid having a relatively high freezing temperature, such as light beer, can be dispensed via the external fluid line 86, while fluids requiring lower temperatures, such as regular (non-light) beers, can be dispensed via fluid lines 28 within metallic unit 10.

According to the invention, further modifications can be made to the apparatus. In particular, a cold plate unit and a dispenser unit can be produced as separate components.

In Figures 11a-c, a cold plate unit 110 includes a plurality of fluid lines 28 and coolant lines 22, similarly to the embodiment of Figure 5. In this embodiment, however, the top loops 46 of coolant lines 22 are replaced by secondary inlet and outlet manifolds 112 and 114, respectively. Consequently, the individual continuous coolant lines 22 of the embodiment of Figure 5 are replaced by first coolant line segments 22a connecting the



primary inlet manifold 24 and the secondary inlet manifold 112, and second coolant line segments 22b connecting the secondary outlet manifold 114 and the primary outlet manifold 26.

Coolant emerges from secondary inlet manifold 112 via line 116, which  
5 preferably includes fitting 118 to facilitate connection with a dispenser unit such as the units described below. Secondary outlet manifold 114 includes line 120, which preferably includes fitting 122 to facilitate connection with the dispenser unit. Coolant from the dispenser unit enters secondary outlet manifold 114 via line 120 and returns to cold plate 110. Outlet ends 32 of  
10 fluid lines 28 also preferably include fittings 124 for connecting with the dispenser unit.

In Figure 12, cold plate 130, without a tower unit 14 as in Figures 5 and 11a, includes similar manifolding of the coolant lines 28 at the top of the cold plate 130, rather than at the top of the tower unit.

15 The separate cold plate units of Figures 11-12 preferably do not include restrictor segments 64 in the fluid lines 28.

Figures 13 and 14a-b illustrate the coil baskets of embodiments of a separate dispenser unit suitable for use with the separate cold plates of Figures 11-12. As with other embodiments of the present invention, the coil  
20 baskets of Figures 13 and 14a-b are enclosed within a metallic unit, preferably an aluminum unit, formed in accordance with the processes set forth herein. In effect, the separate dispenser units act as auxiliary cold plates which can be disposed on the top of a surface, such as a bar counter, and attached to the primary cold plate unit disposed beneath the surface.

25 In Figure 13, dispenser inlet coolant line 131, preferably provided with fitting 132 which is adapted to engage with fitting 118 of a separate cold plate such as described above, is connected to dispenser inlet coolant manifold 134. A plurality of dispenser coolant lines 136 (two lines illustrated) are connected to dispenser inlet coolant manifold 134, and are formed into a  
30 plurality of coils, such as rectangular coils, as shown. Dispenser coolant lines 136 then are connected to dispenser outlet coolant manifold 138, which in turn is connected to dispenser outlet coolant line 140. Line 140 preferably is provided with fitting 142 which is adapted to engage with fitting 122 of a

separate cold plate such as described above.

Disposed within the plurality of coils of the dispenser coolant lines 136 is one or more fluid lines 144 (one line illustrated). Fluid line 144 is preferably arranged in a plurality of coils as shown, and has an inlet section 146 which  
5 preferably is provided with a fitting 148 adapted to engage with a fitting 124 of a fluid line 32 in a cold plate unit as described above. Fluid line 144 also has an outlet section 150 which in turn is connected to tap fitting 34, to which a tap head (not shown) is connected to dispense a cooled fluid.

If desired, portions of the dispenser fluid lines 144 can be formed as  
10 restricter segments in the manner described above.

Figure 14a illustrates a coil basket of a dispenser unit for multiple cooled fluid lines, which can be uncoiled (as illustrated) or coiled. Four fluid lines 146 are illustrated; however, up to 10 or more fluid lines can be employed if desired. As shown in Figure 14, inlet section 131 and outlet section 140 may  
15 be eliminated, and fittings 132 and 142 may be connected directly to inlet and outlet manifolds 134 and 138, respectively.

In Figure 14b, the coil basket of Figure 14a is incorporated in metallic unit 145, with a layer of insulation 149 surrounding the metallic unit and a shell 151 in turn surrounding the insulation layer. The insulation layer 149  
20 can be formed as described herein.

A dispenser unit according to the invention can have any desired orientation, such as vertical, horizontal or inclined, depending on the nature of the space available for mounting the unit, the decorative effect sought to be achieved, and other design factors. Furthermore, the inventive dispenser unit  
25 any desired shape can be produced. Such shapes include, without limitation, a cube, a rectangular prism, a cylinder, etc. The coiled coolant and fluid lines can be formed as square or rectangular coils, circular coils, or any other desired configuration. Furthermore, the dispenser unit can be encased by a sheathing having a shape that is the same as, or different from, the shape of  
30 the unit itself. For example, a cubical dispenser unit can be encased in a horizontally oriented, barrel-shaped sheathing.

A cylindrical, or tower, dispensing unit is illustrated in Figs. 15a-b. The coil basket embodiment illustrated in Figure 15a is an alternative configuration

in which the coolant lines 136 are not manifolded, and in which the individual coolant lines 136 are formed into coils of varying length. In Figure 15b, metallic unit 152 encloses the coil basket. A layer of insulation 154 surrounds metallic unit 152, and in turn is surrounded by shell 156. The insulation layer 154 can be formed as described herein.

As illustrated above, the separate cold plates 110 and 130 include fluid lines 28 with inlets 30 at the bottom of the cold plates and outlets 32 at the top of the cold plates. An alternative embodiment of a separate cold plate 160 is illustrated in Figure 16, in which fluid inlets 30 and outlets 32 are both located at the same end of the cold plate 160, between the coolant primary inlet and outlet manifolds 24 and 26. This embodiment is useful in both vertical and horizontal orientations

Figure 16 also illustrates use of bands 162 to maintain the coil basket in a compact shape prior to the metal casting procedure used to form the metallic unit.

A dispenser unit according to the invention can be employed together with a cold plate unit as described above. Alternatively, the dispenser unit can be used by itself as a complete liquid cooling device. In another alternative, the dispenser unit can be used together with a plurality of additional cold plate units as described herein to form a multi-unit system.

Figures 17-22 illustrate a number of exemplary systems employing one or more of the cold plate and/or dispenser units described herein. The exemplary systems employ cooled glycol as the coolant. Other conventional coolants can be employed if desired.

In Figure 17, a conventional refrigerated glycol heat exchanger unit 200 supplies cooled glycol via glycol delivery line 202 to primary inlet manifold 24 of cooling apparatus 214, which includes cold plate unit 216 and dispenser unit 218. The cooled glycol circulates through cooling apparatus 214 and exits via primary outlet manifold 26 to glycol return line 204 and thence to glycol heat exchanger unit 200 for refrigeration and recycling. Fluid to be cooled, in this example beer, is supplied from a plurality of kegs 206 stored in cold room 210 via fluid supply lines 208 to fluid lines 28 of cooling apparatus 214. The fluid is chilled within cooling apparatus 214 and is dispensed from

tap heads 84. At least a portion of the lengths of the glycol delivery line 202, glycol return line 204, and fluid supply lines 208 between the glycol heat exchanger unit 200 and the cooling apparatus 214 are bundled together and insulated to form trunk line 212.

5 If desired, the dispenser unit 218 can be employed by itself, without the cold plate unit 216. In another alternative, cooling apparatus 214 can be replaced by an "integral unit"-type cold plate 1 as described herein.

The systems of Figure 18 and 19 are similar to that of Figure 17, but provide additional cooling capability for high-volume use by including an  
10 additional cold plate. In this embodiment, cooled glycol is supplied via glycol delivery line 202 to integral cold plate 1. From integral cold plate 1 the glycol is supplied via return line 220 to auxiliary cold plate 222. After cooling auxiliary cold plate 222 the glycol is returned via return line 224 to glycol heat exchanger unit 200. Fluid to be cooled is supplied via fluid lines 208 to  
15 auxiliary cold plate 222, and thence via fluid lines 226 to cooling apparatus 214 for final cooling and dispensing.

In Figure 19, integral cold plate 1 is replaced by cooling apparatus 214 including cold plate unit 216 and dispenser unit 218.

The systems of Figures 20-22 are analogous to the systems of Figures  
20 17-19, but include a pre-chill cold plate 228. These systems are particularly useful when the fluid to be dispensed is stored at ambient temperature rather than in a cold room.

In Figure 20, cooled glycol from glycol heat exchanger unit 200 is initially supplied via glycol supply line 202 to pre-chill cold plate 228. From  
25 pre-chill cold plate 228 glycol flows via glycol supply line 230 to cooling apparatus 214, the returns via glycol return line 232 to pre-chill cold plate 228, and finally via return line 234 to heat exchanger unit 200. Fluid to be cooled is supplied from kegs 206 via lines 208 to pre-chill cold plate 228, where it is cooled to an intermediate temperature between ambient  
30 temperature and the desired dispensing temperature. From pre-chill cold plate 228 the fluid is supplied via lines 236 to cooling apparatus 214, where it is cooled to the desired temperature and dispensed from tap heads 84.

In Figure 21, cooled glycol from glycol heat exchanger unit 200 is

initially supplied via glycol supply line 202 to pre-chill cold plate 228. From pre-chill cold plate 228 glycol flows via glycol supply line 230 to integral cold plate 1, returns via glycol return line 238 to auxiliary cold plate 222, thence via return line 240 to pre-chill cold plate 228, and finally via return line 242 to  
5 heat exchanger unit 200. Fluid to be cooled is supplied from kegs 206 via lines 208 to pre-chill cold plate 228, where it is cooled to an intermediate temperature between ambient temperature and the desired dispensing temperature. From pre-chill cold plate 228 the fluid is supplied via lines 244 to auxiliary cold plate 222, where it is further cooled, and thence via lines  
10 246 to integral cold plate 1, where it is cooled to the desired temperature and dispensed from tap heads 84.

Finally, in Figure 22, cooling apparatus 214 is used in place of integral cold plate 1. If desired, dispenser unit 218 can be used alone, without cold plate 216.

What is claimed is:

1. An apparatus for cooling at least one fluid comprising
  - a) a coolant system defining a cold plate portion and a tower portion,
  - 5 b) a fluid system defining a cold plate portion and a tower portion,  
said portions being in heat exchange relationship with said coolant system,
  - c) means for dispensing said at least one fluid from said tower  
portion, and
  - d) a metallic unit comprising unitary cold plate and tower portions
- 10 which respectively incorporate said cold plate and tower portions of said  
coolant system and said fluid system.
2. The apparatus of claim 1 wherein said coolant system comprises
  - i) an inlet manifold,
  - ii) an outlet manifold, and
  - iii) a plurality of coolant lines connecting said inlet and outlet
- 5 manifolds.
3. The apparatus of claim 2 wherein said coolant system comprises  
between 2 and 12 coolant lines.
4. The apparatus of claim 3 wherein said coolant system comprises  
between 2 and 8 coolant lines.
5. The apparatus of claim 4 wherein said coolant system comprises 3  
coolant lines.
6. The apparatus of claim 2 wherein said plurality of coolant lines  
extend in parallel between said inlet and outlet manifolds.
7. The apparatus of claim 2 wherein said inlet and outlet manifolds  
are disposed at least partially within said cold plate portion.
8. The apparatus of claim 7 wherein
  - i) a portion of at least one of said coolant lines comprises said tower  
portion, and
  - ii) the remainder of said at least one coolant lines together with the
- 5 remainder of said plurality of coolant lines comprise said cold plate portion.

9. The apparatus of claim 8 wherein at least one of said coolant lines comprises a first loop which extends from said inlet manifold through said cold plate portion into said tower portion and from said tower portion back into said cold plate portion, and a first plurality of cold plate coolant loops  
5 which at least partially define said cold plate portion, and wherein said remainder of said plurality of coolant lines each comprise a second plurality of cold plate coolant loops which at least partially define said cold plate portion together with said first plurality of cold plate coolant loops.

10. The apparatus of claim 2 wherein said coolant system is comprised of stainless steel.

11. The apparatus of claim 2 wherein said fluid system comprises a plurality of separate fluid lines which are interlaced with said plurality of coolant lines.

12. The apparatus of claim 11 wherein the number of said plurality of fluid lines is less than the number of said plurality of coolant lines.

13. The apparatus of claim 11 wherein each of said plurality of fluid lines includes

- i) an inlet fitting,
- ii) a plurality of cold plate fluid loops which at least partially define  
5 said cold plate portion, and
- iii) an end segment which extends from said cold plate portion through said tower portion and which is connected to said means for dispensing said at least one fluid.

14. The apparatus of claim 13 wherein said means for dispensing said at least one fluid comprises

- i) a plurality of fittings each joined to one of said plurality of fluid lines, and
- 5 ii) a plurality of taps each affixed to one of said plurality of fittings.

15. The apparatus of claim 13 wherein at least one of said plurality of fluid lines comprises a restrictor segment which includes said end segment.

16. The apparatus of claim 15 wherein said restrictor segment further comprises a portion of at least one of said plurality of cold plate fluid loops.

17. The apparatus of claim 11 wherein said fluid system further comprises a fluid line at least partially disposed on a surface of said cold plate portion of said metallic unit.

18. The apparatus of claim 13 wherein said fluid system is comprised of stainless steel.

19. The apparatus of claim 1 wherein said metal unit comprises aluminum or an aluminum alloy.

20. The apparatus of claim 1 further comprising a tower sheath disposed about said tower portion.

21. The apparatus of claim 1 further comprising an insulating material disposed about at least a portion of said metal unit.

22. An apparatus for cooling at least one fluid comprising

a) a coolant system defining a cold plate portion and a tower portion, said coolant system comprising

- i) an inlet manifold,
- ii) an outlet manifold, and
- iii) a plurality of coolant lines connecting said inlet and outlet manifolds,

wherein a portion of at least one of said coolant lines comprises said tower portion and the remainder of said at least one coolant lines together with the remainder of said plurality of coolant lines comprise said cold plate portion.

b) a fluid system defining a cold plate portion and a tower portion, said portions being in heat exchange relationship with said cold plate portion and said tower portion of said coolant system, respectively, said fluid system comprising at least one fluid line comprising

- i) an inlet fitting,
- ii) a plurality of cold plate fluid loops which at least partially define said cold plate portion, and
- iii) an end segment which extends from said cold plate portion through said tower portion,



- c) means for dispensing said at least one fluid from said tower portion, said means being connected to said end segment of said at least one fluid line,
- d) a metallic unit comprising unitary cold plate and tower portions  
5 which respectively incorporate said cold plate and tower portions of said coolant system and said fluid system, said metallic unit being comprised of aluminum or an aluminum alloy,
- e) a tower sheath disposed about said tower portion of said metallic unit and defining a space therebetween, and
- 10 f) insulating means disposed within said space defined between said tower sheath and said tower portion.
23. A cold plate unit comprising
- i) a coolant system comprising a primary inlet manifold, a secondary inlet manifold, a secondary outlet manifold and a primary outlet manifold, said coolant system further comprising a first plurality of coolant  
5 line segments connecting said primary inlet manifold and said secondary inlet manifold and a second plurality of coolant line segments connecting said secondary outlet manifold and said primary outlet manifold,
- ii) a fluid system in heat exchange relationship with said coolant system, and
- 10 iii) a metallic unit which incorporates said coolant system and said fluid system.
24. The cold plate unit of claim 23 wherein said first and second pluralities of coolant line segments comprise from 2 to 12 coolant line segments.
25. The cold plate unit of claim 23 wherein said fluid system comprises a plurality of separate fluid lines which are interlaced with said first and second pluralities of coolant line segments.
26. The cold plate of claim 25 wherein the number of said plurality of fluid lines is less than the number of said plurality of coolant lines.
27. The cold plate of claim 23 wherein said fluid system is comprised of stainless steel.

28. The cold plate of claim 23 wherein said metallic unit comprises aluminum or an aluminum alloy.

29. The cold plate of claim 23 further comprising an insulating material disposed about at least a portion of said metallic unit.

30. The cold plate of claim 23 wherein

5 i) said coolant system defines a cold plate portion and a tower portion, said cold plate portion includes said primary inlet manifold and said primary outlet manifold and said tower portion includes said secondary inlet manifold and said secondary outlet manifold,

10 ii) said fluid system defines a cold plate portion and a tower portion, said portions being in heat exchange relationship with said coolant system, and iii) said metallic unit includes unitary cold plate and tower portions which respectively incorporate said cold plate and tower portions of said coolant and fluid systems.

31. The cold plate of claim 30 further comprising a tower sheath disposed about said tower portion of said metallic unit.

32. A dispenser unit comprising.

i) a coolant system comprising a dispenser inlet manifold and a dispenser outlet manifold, said coolant system further comprising a plurality of coiled coolant lines,

5 ii) a fluid system in heat exchange relationship with said coolant system, said fluid system being disposed at least partially within said coiled coolant lines, and

iii) a metallic unit which incorporates said coolant system and said fluid system.

33. The dispenser unit of claim 32 wherein said fluid system comprises a plurality of separate fluid lines.

34. The dispenser unit of claim 33 wherein at least one of said plurality of fluid lines comprises a restrictor segment.

35. The dispenser unit of claim 32 wherein said fluid system is comprised of stainless steel.

36. The dispenser unit of claim 32 wherein said metal unit comprises aluminum or an aluminum alloy.

37. The dispenser unit of claim 32 further comprising an insulating material disposed about at least a portion of said metallic unit.

38. An apparatus for cooling at least one fluid comprising

a) a cold plate unit comprising

i) a coolant system defining a cold plate portion and a tower portion, said cold plate portion comprising a primary inlet manifold, a secondary inlet manifold, a secondary outlet manifold and a primary outlet manifold, said coolant system further comprising a first plurality of coolant line segments connecting said primary inlet manifold and said secondary inlet manifold and a second plurality of coolant line segments connecting said secondary outlet manifold and said primary outlet manifold,

ii) a fluid system defining a cold plate portion and a tower portion, said portions being in heat exchange relationship with said coolant system, and

iii) a metallic unit which incorporate said coolant system and said fluid system, and

b) a dispenser unit comprising.


i) a coolant system comprising a dispenser inlet manifold and a dispenser outlet manifold, said coolant system further comprising a plurality of coiled coolant lines,

ii) a fluid system in heat exchange relationship with said coolant system, said fluid system being disposed at least partially within said coiled coolant lines, and

iii) a metallic unit which incorporates said coolant system and said fluid system.

39. The apparatus of claim 38 wherein cold plate unit and said dispenser unit further comprise fittings adapted to enable engagement of the coolant systems and fluid systems, respectively, of said cold plate and said dispenser unit.

1/24

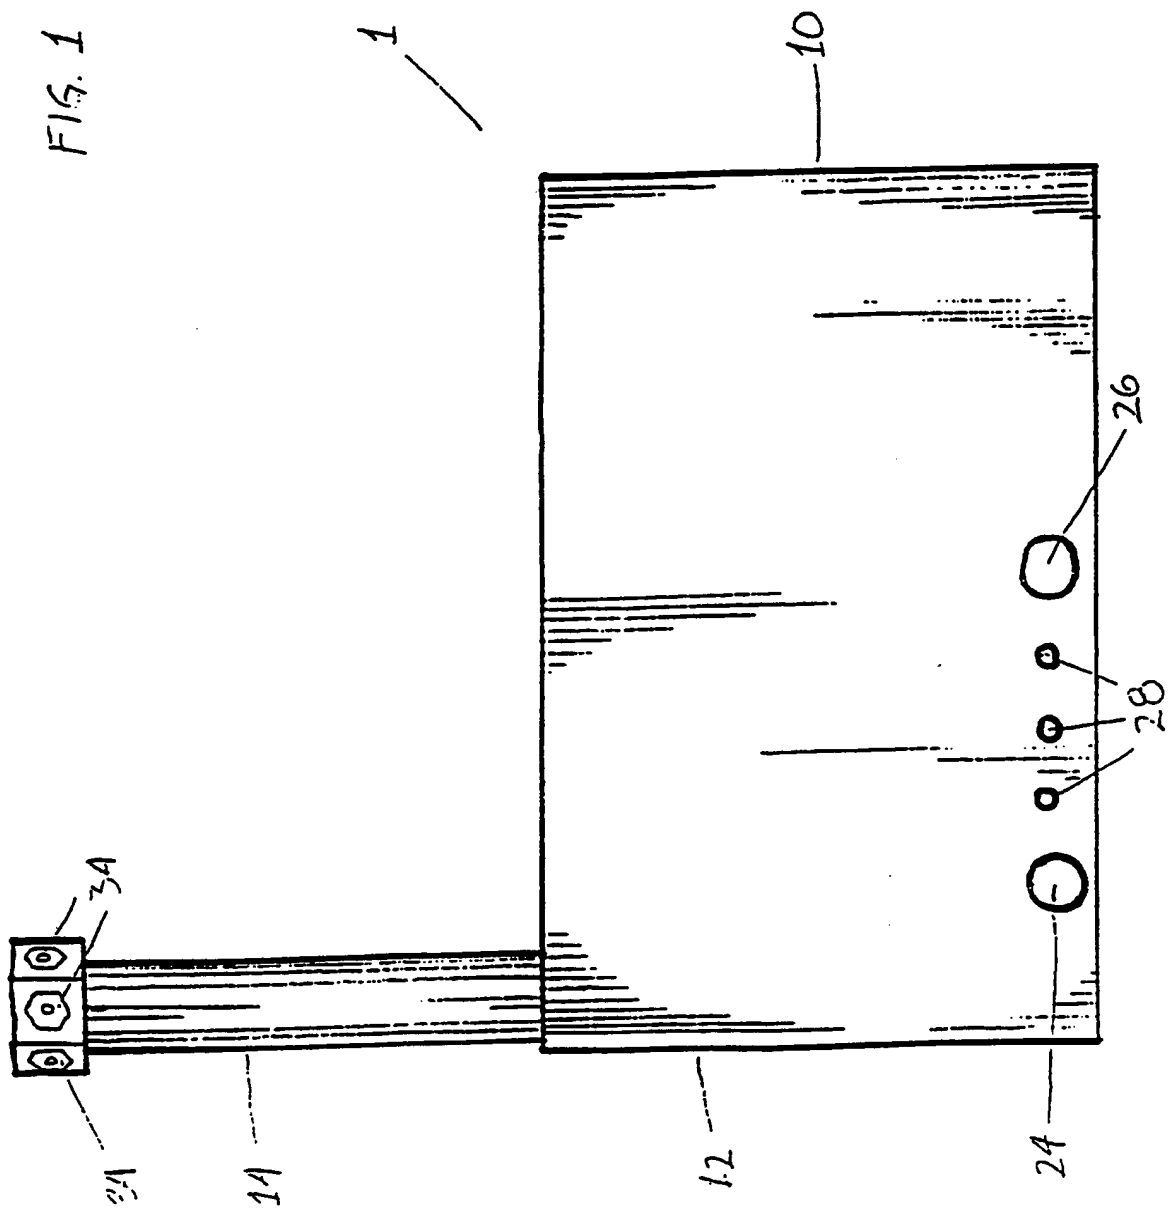

2/24




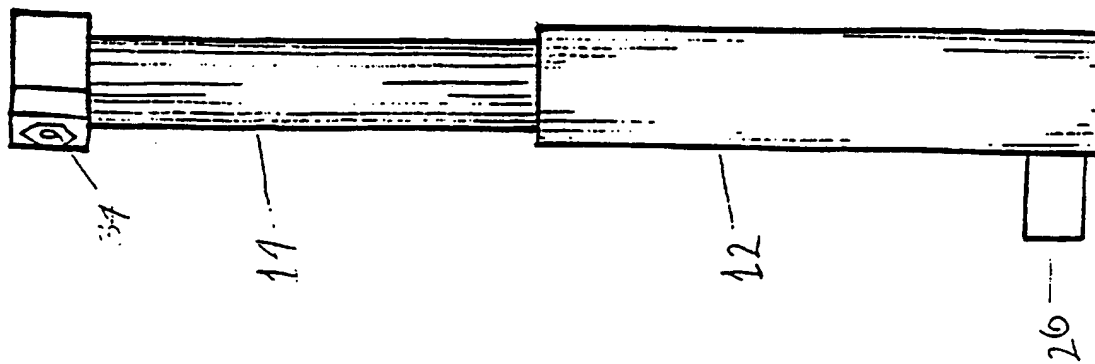


FIG. 3

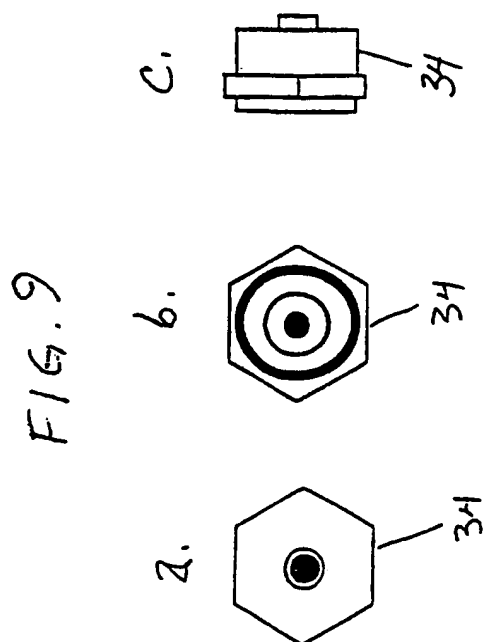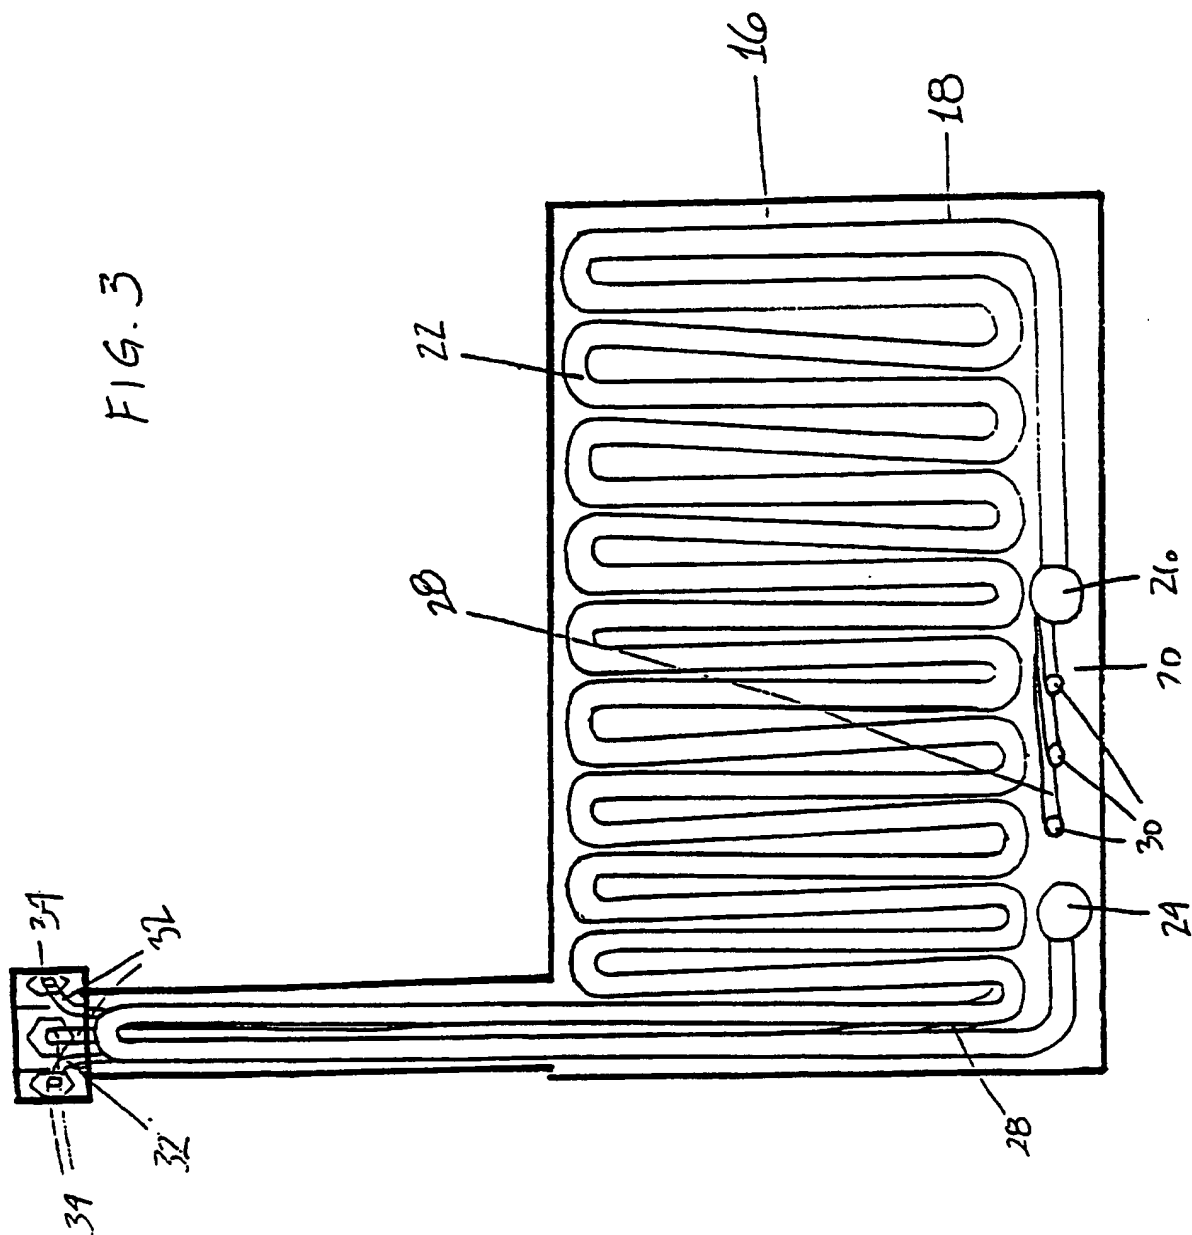

4/24

FIG. 4

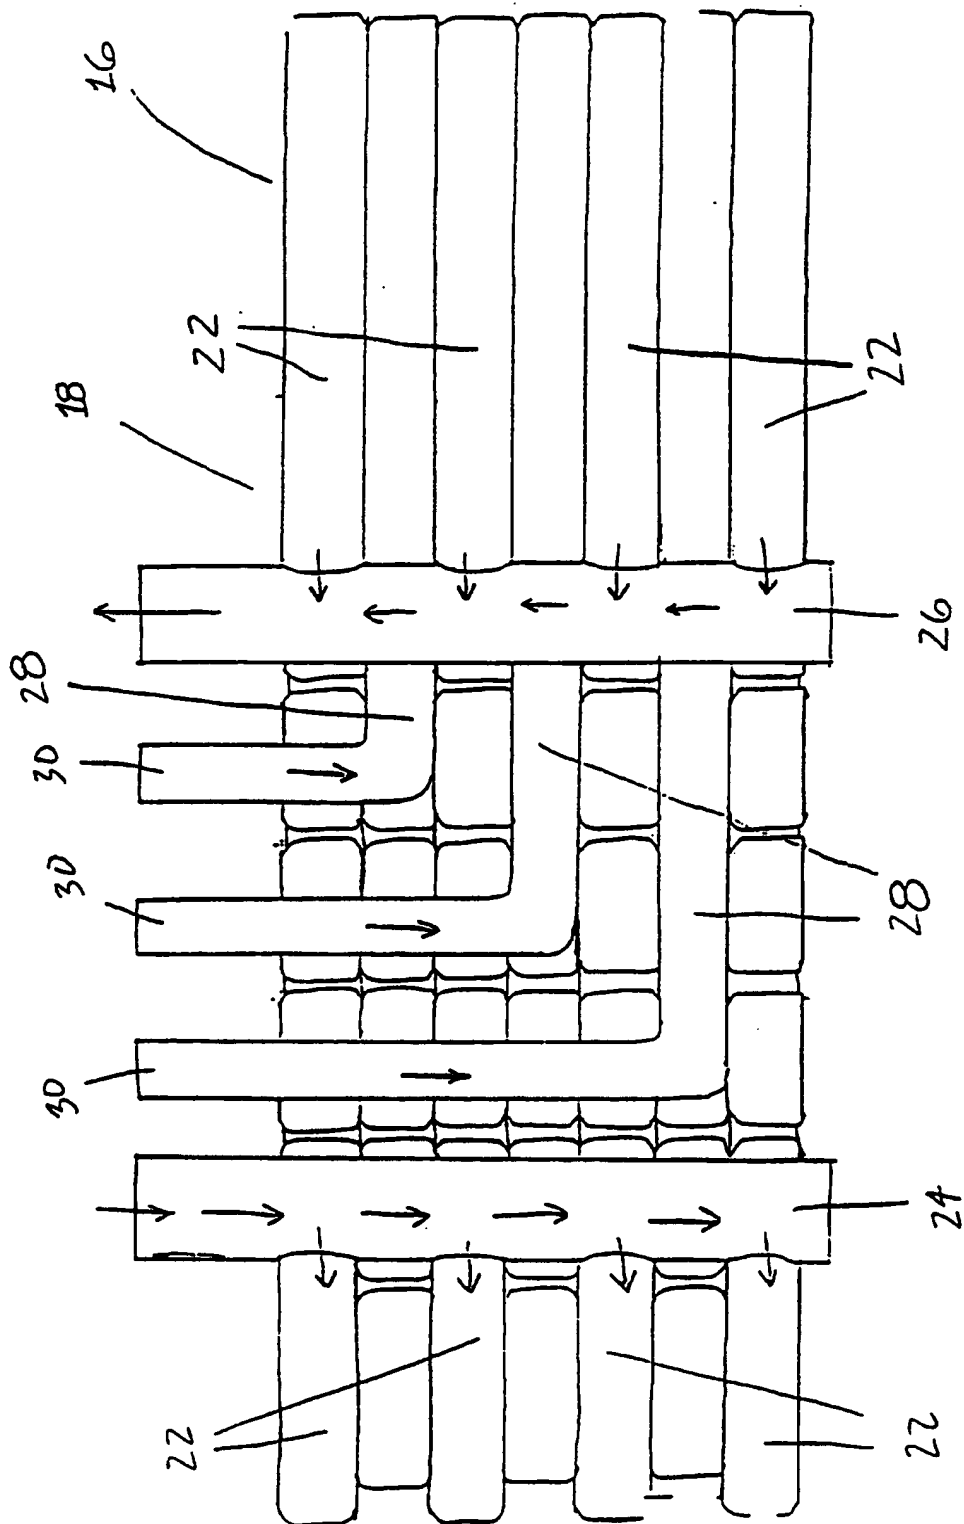

5/24


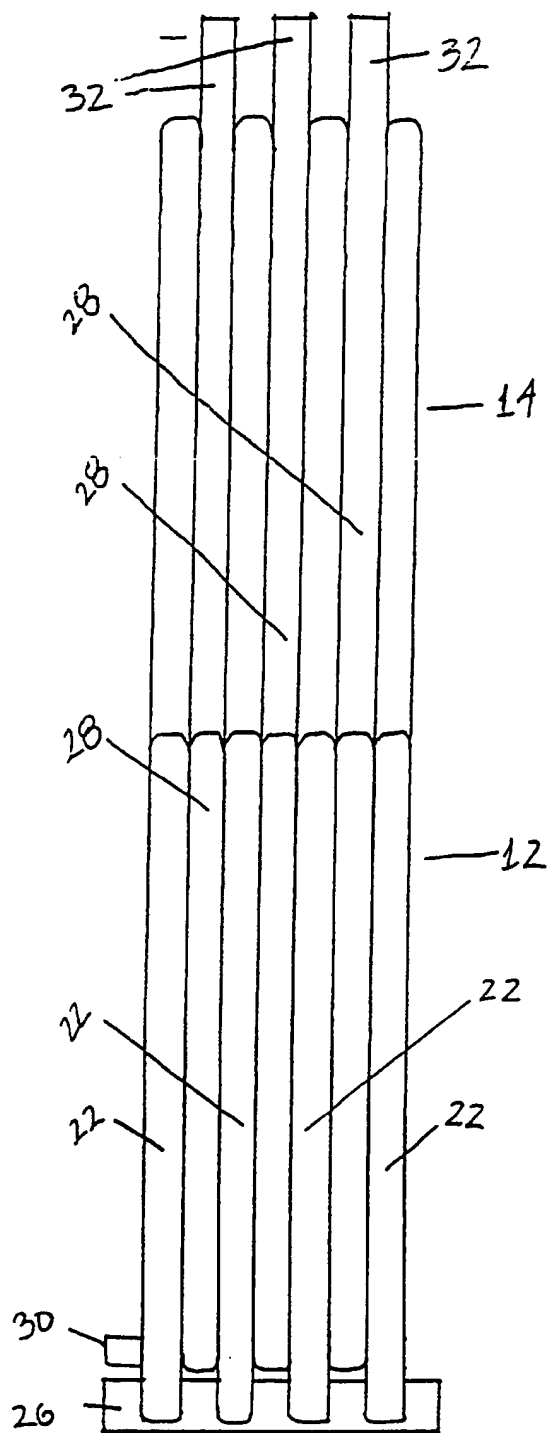


FIG 5




6/24

FIG. 6

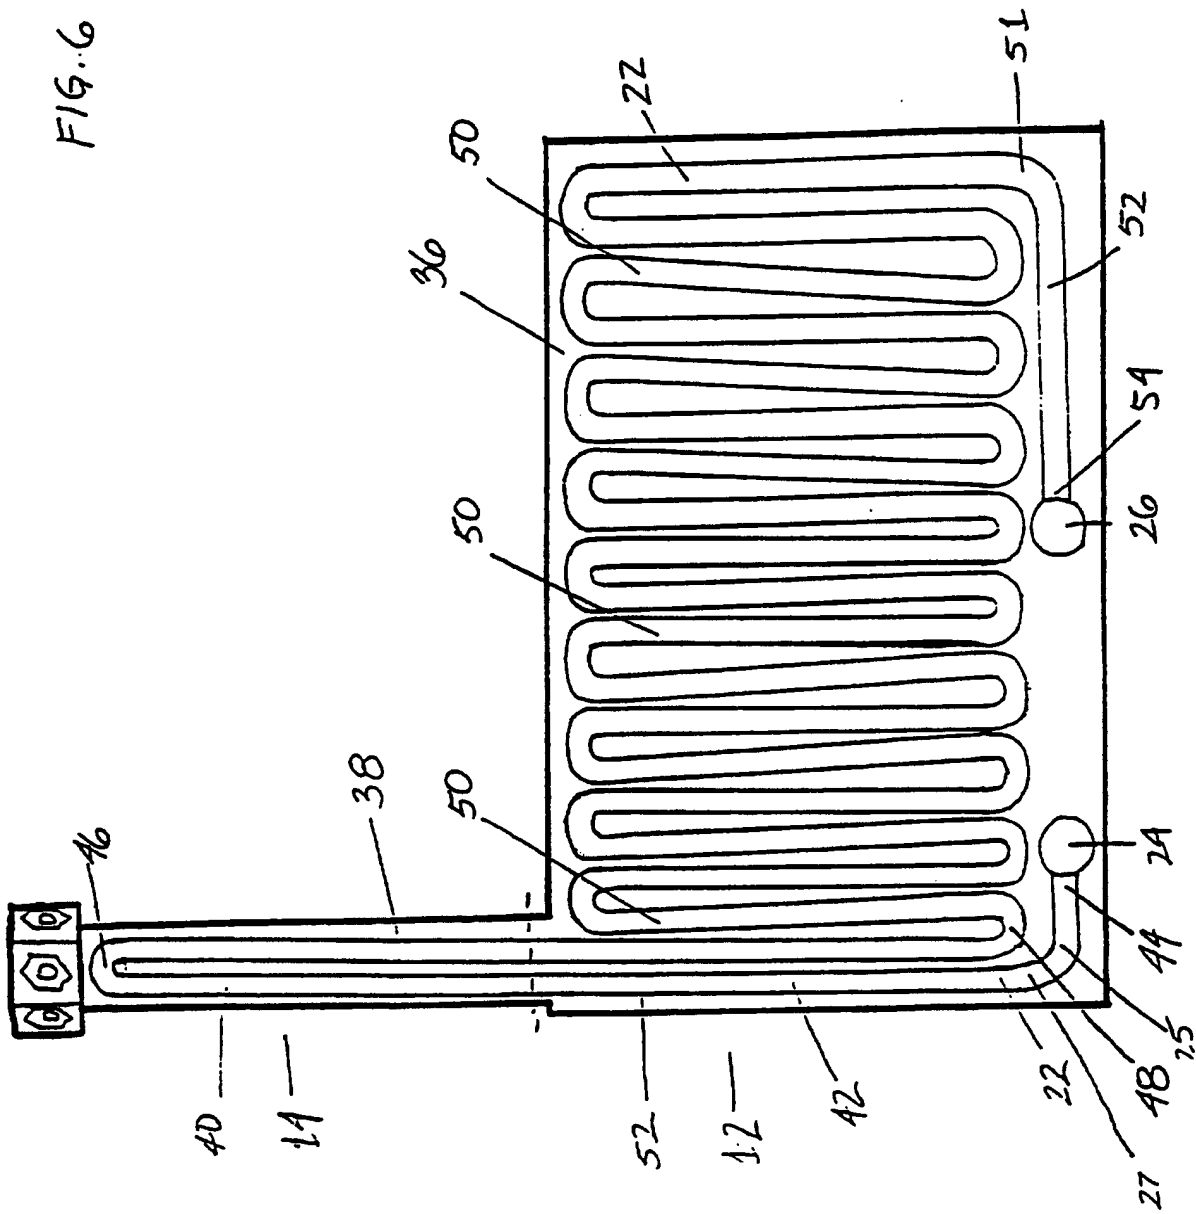

7/24

FIG. 7

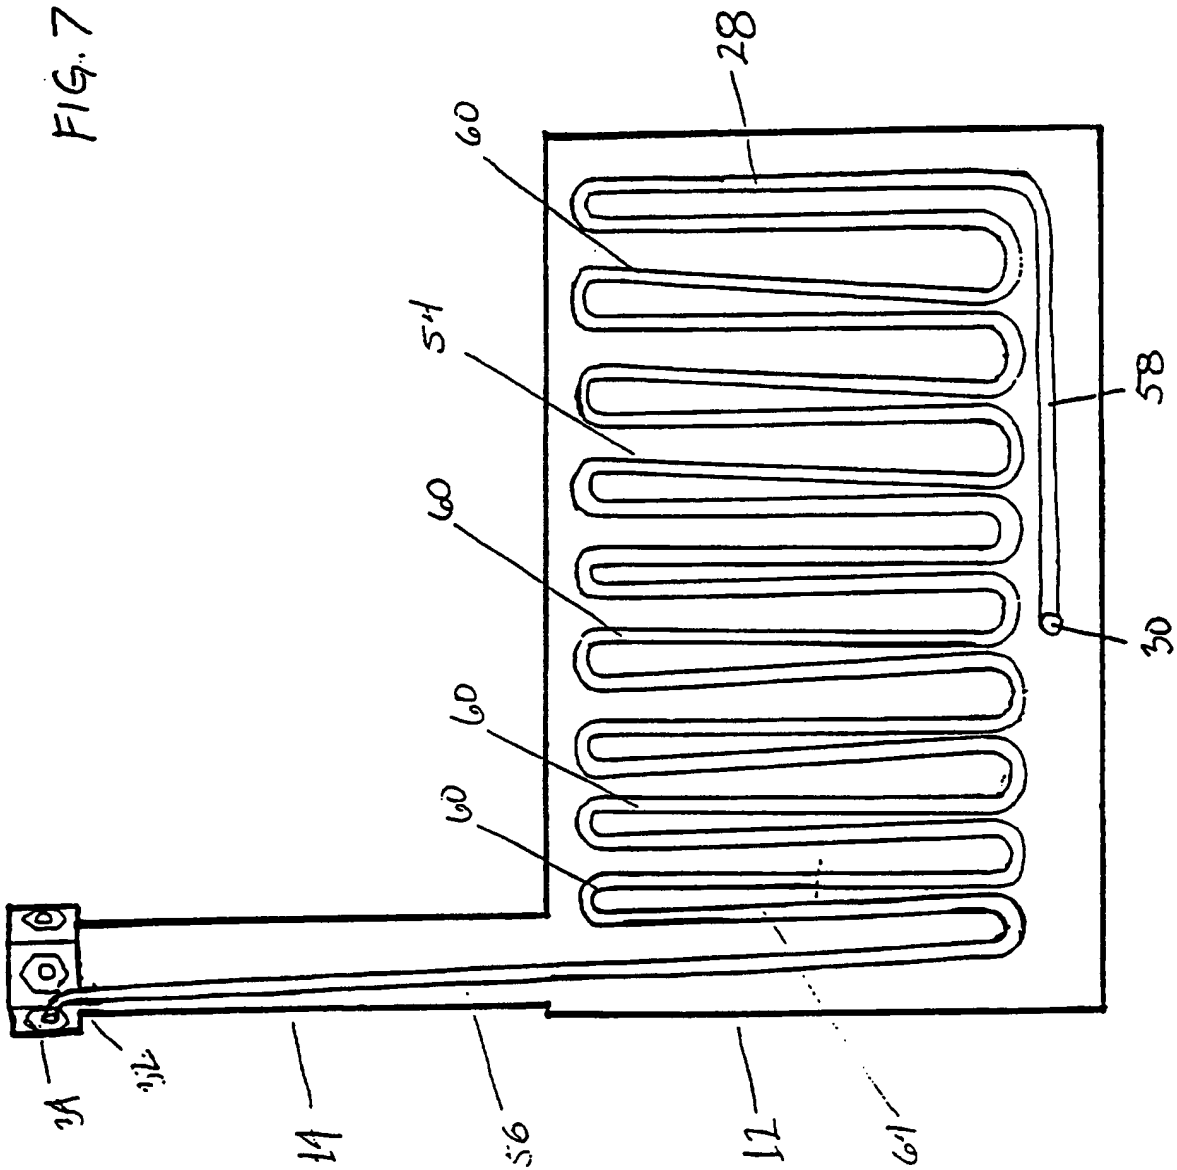

8/24

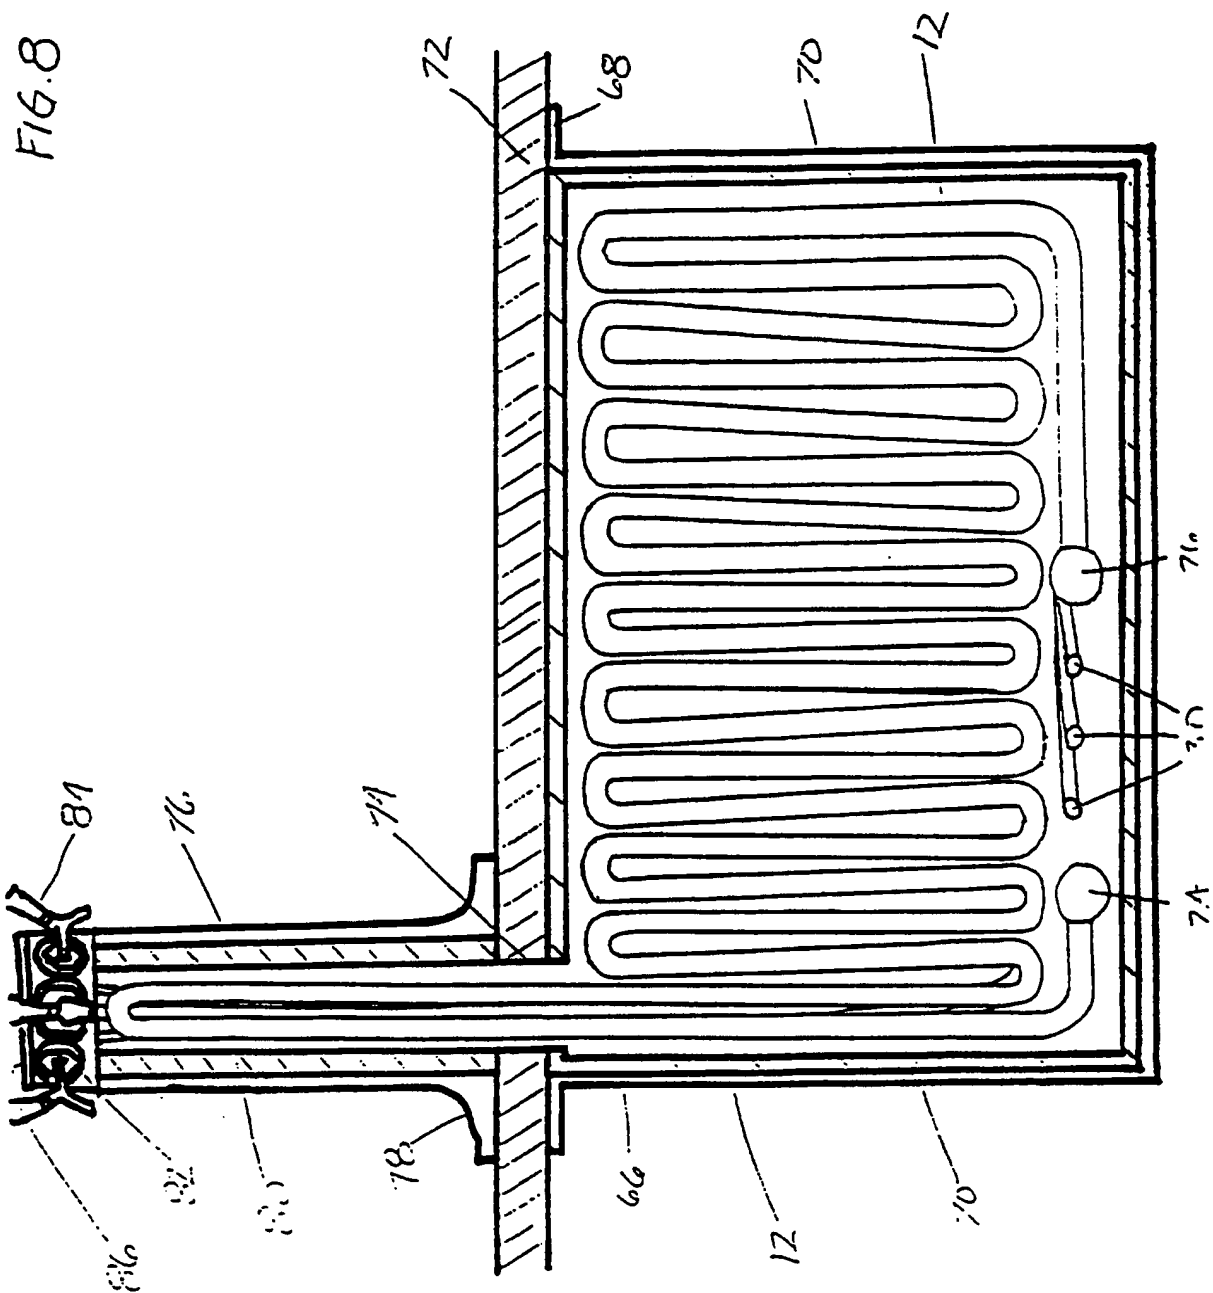
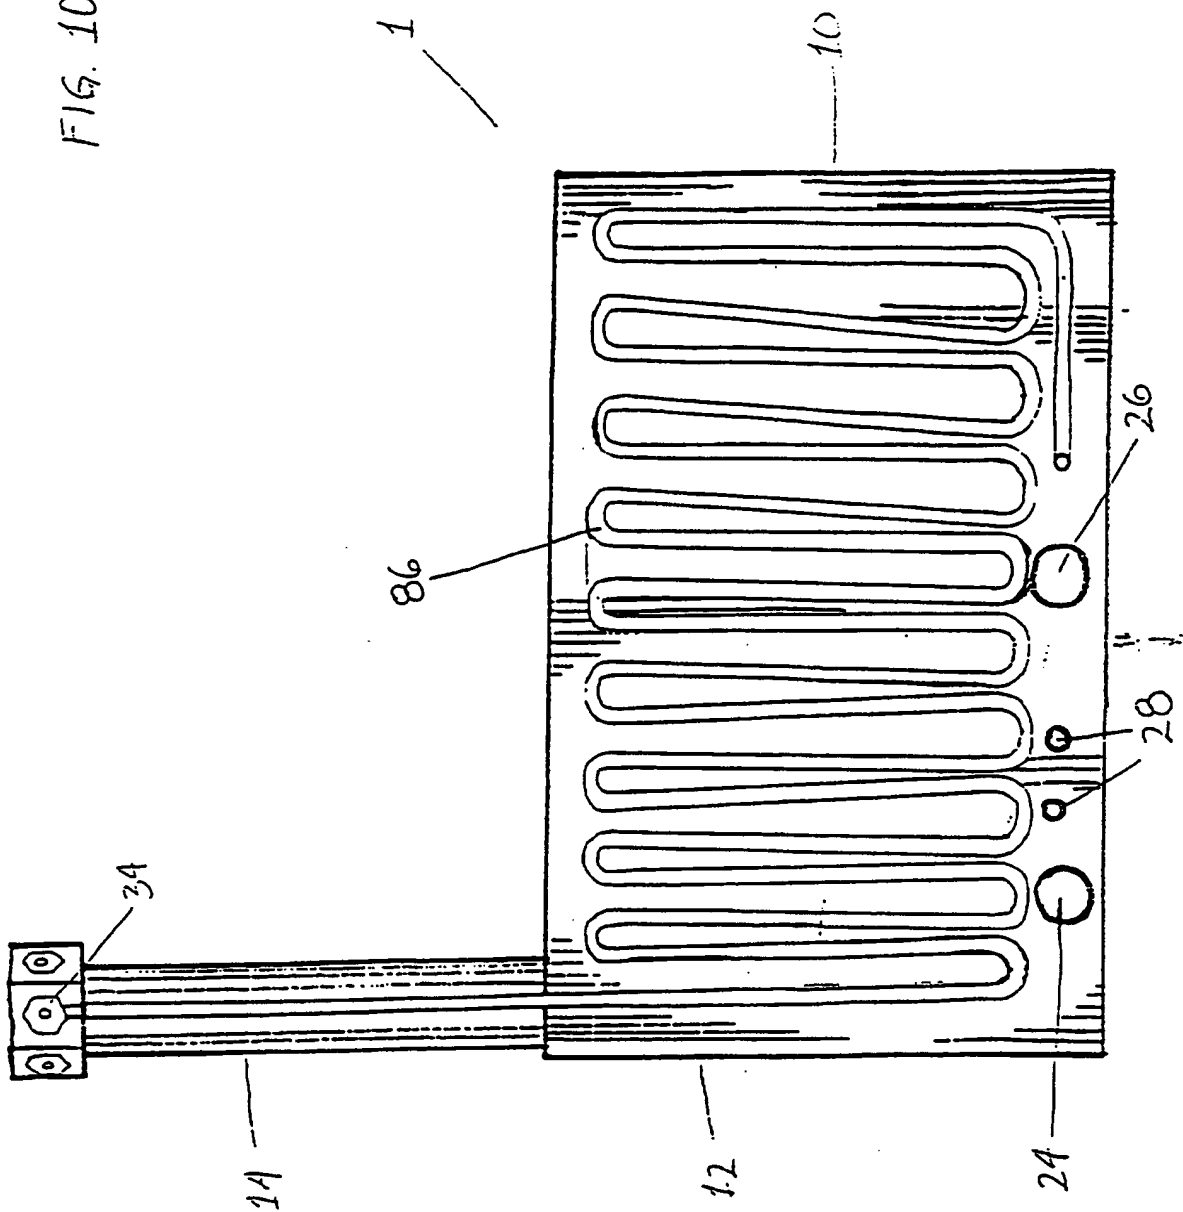


FIG. 10

9/24



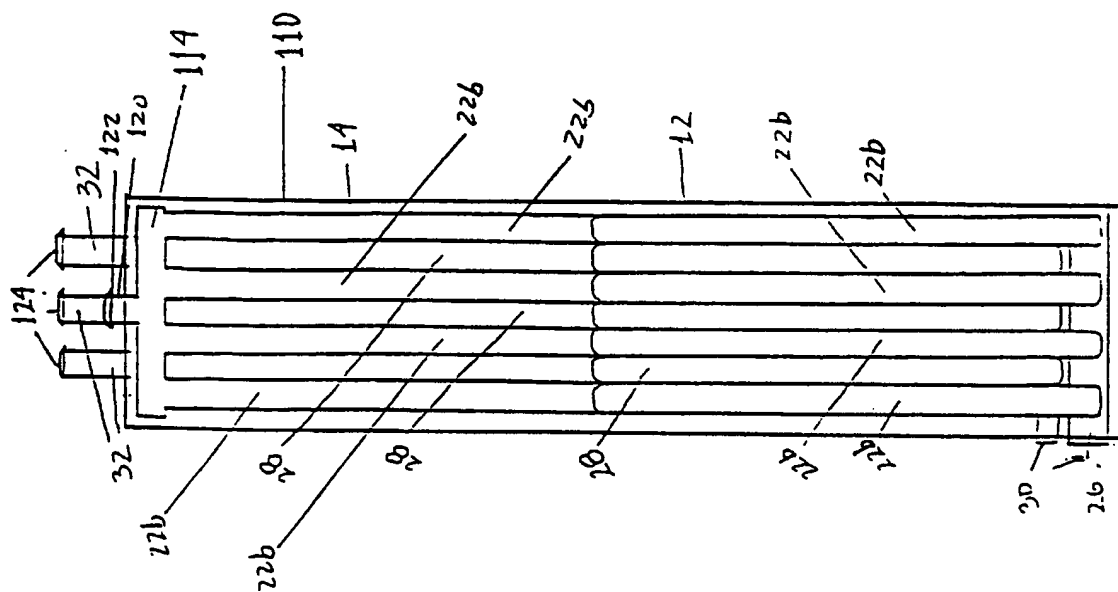


FIG. 11a

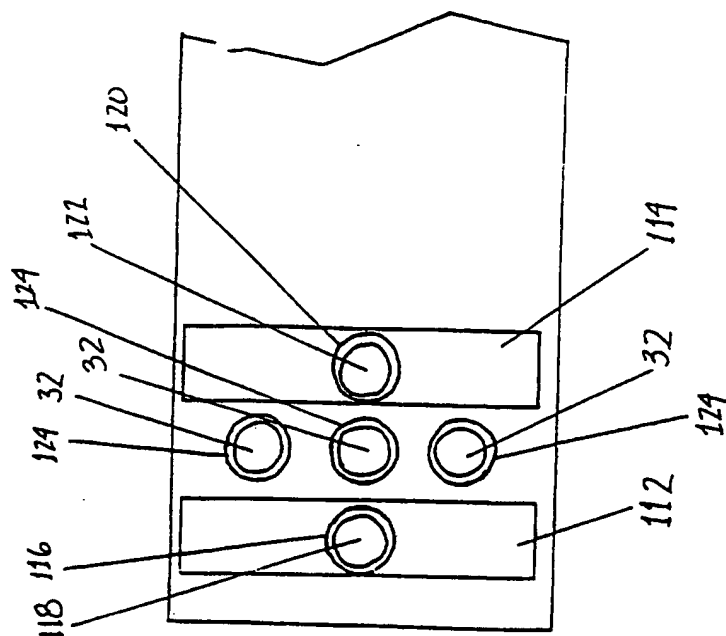


FIG. 11b

11/24

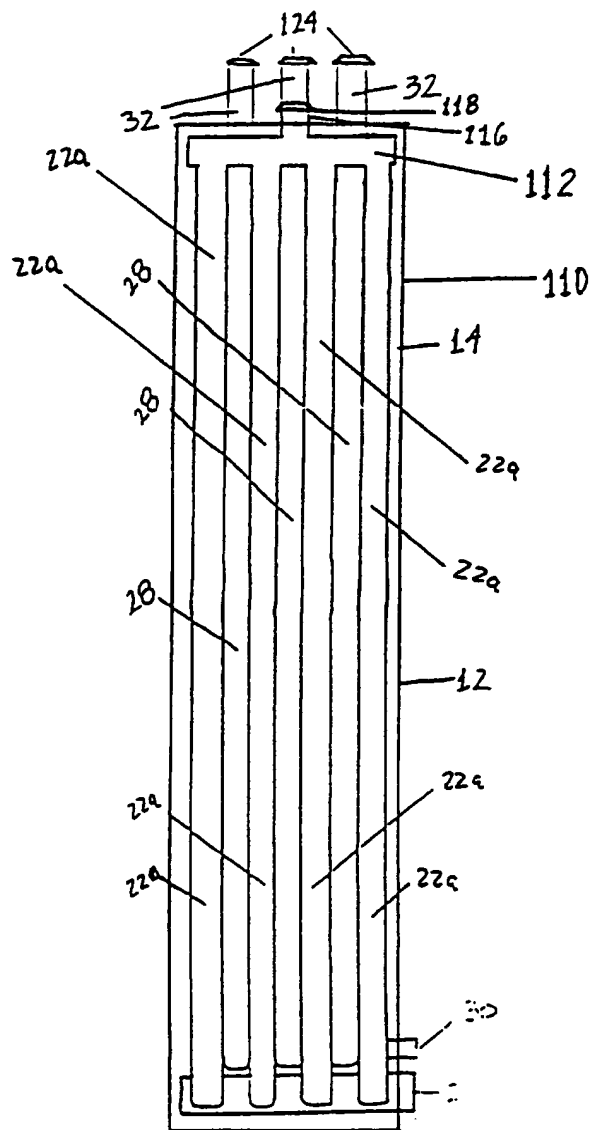


FIG. 11c

12/24



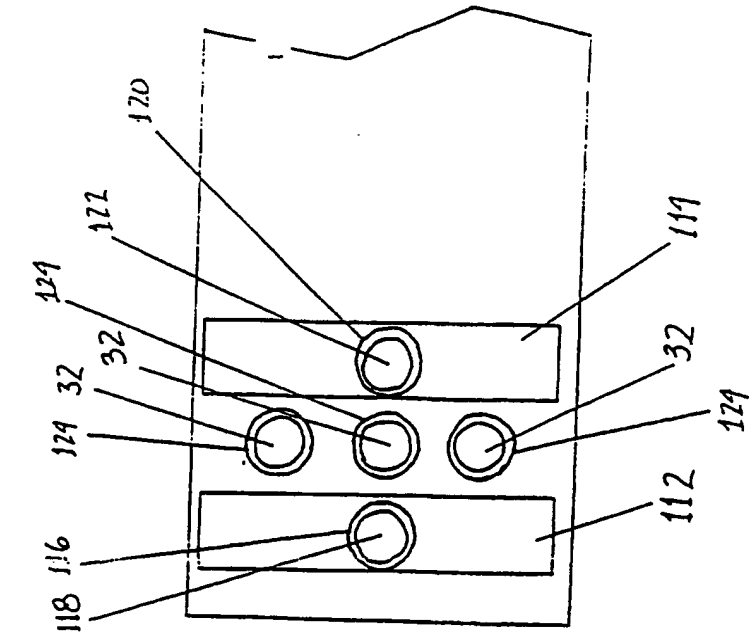


FIG. 12b



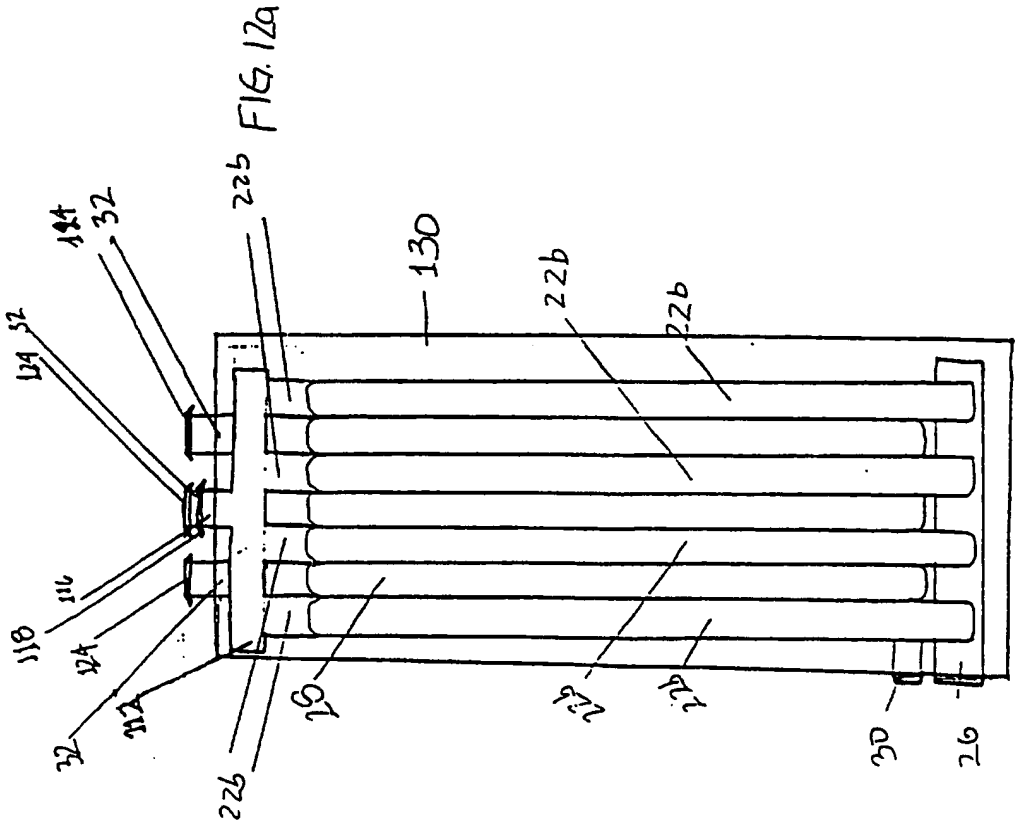

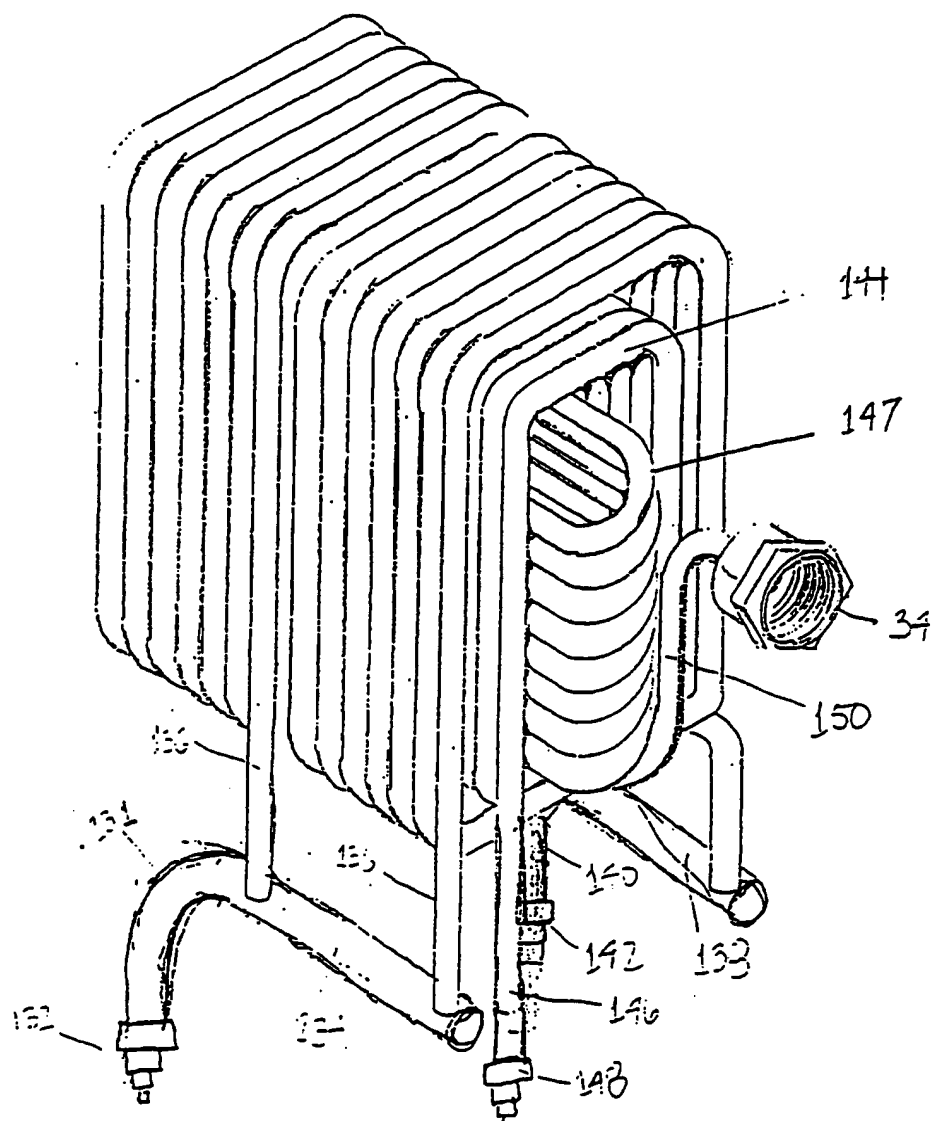

14/24

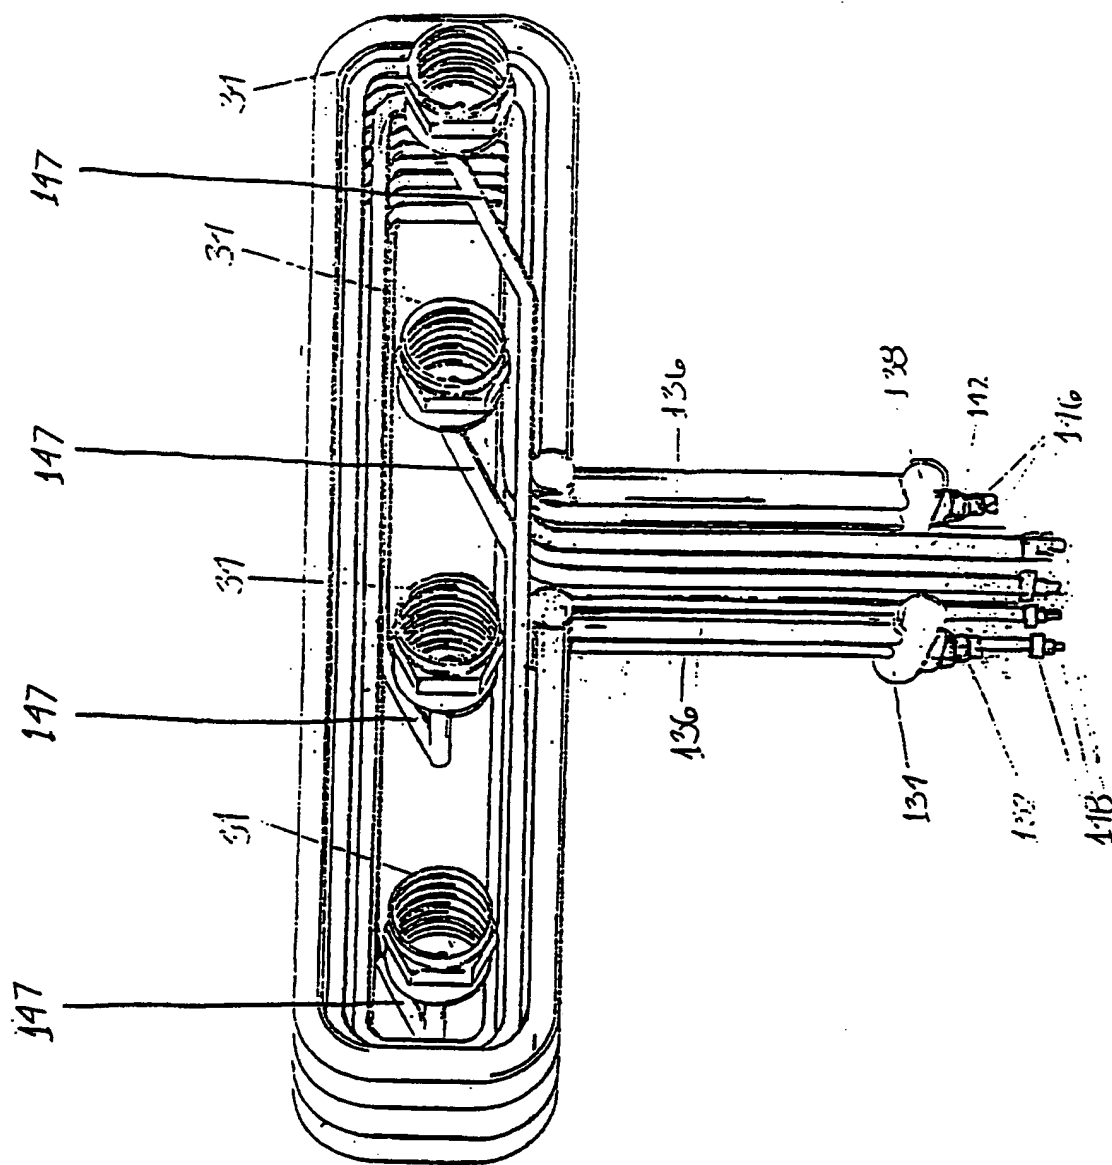


FIG. 1a


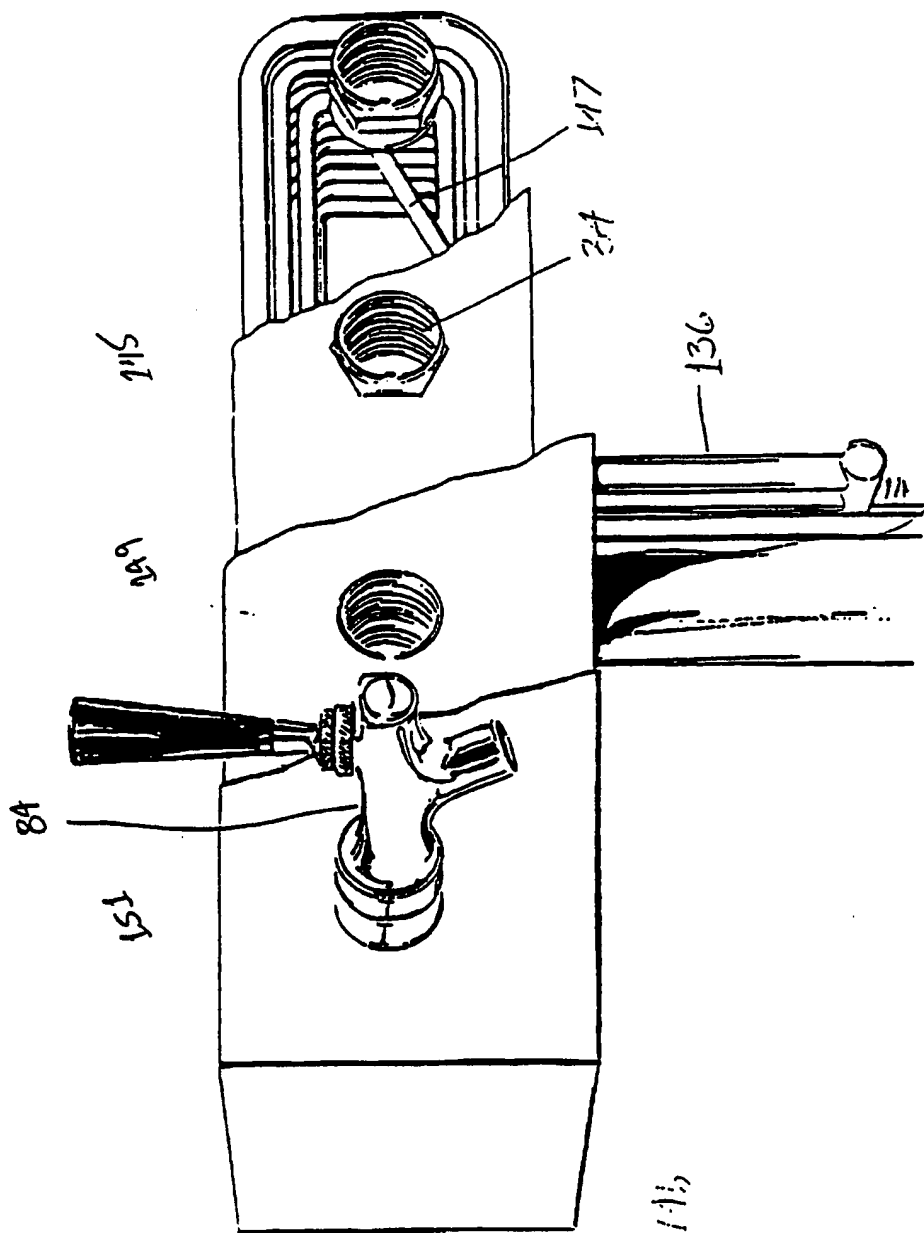


FIG. 11b

16/24

FIG. 15a

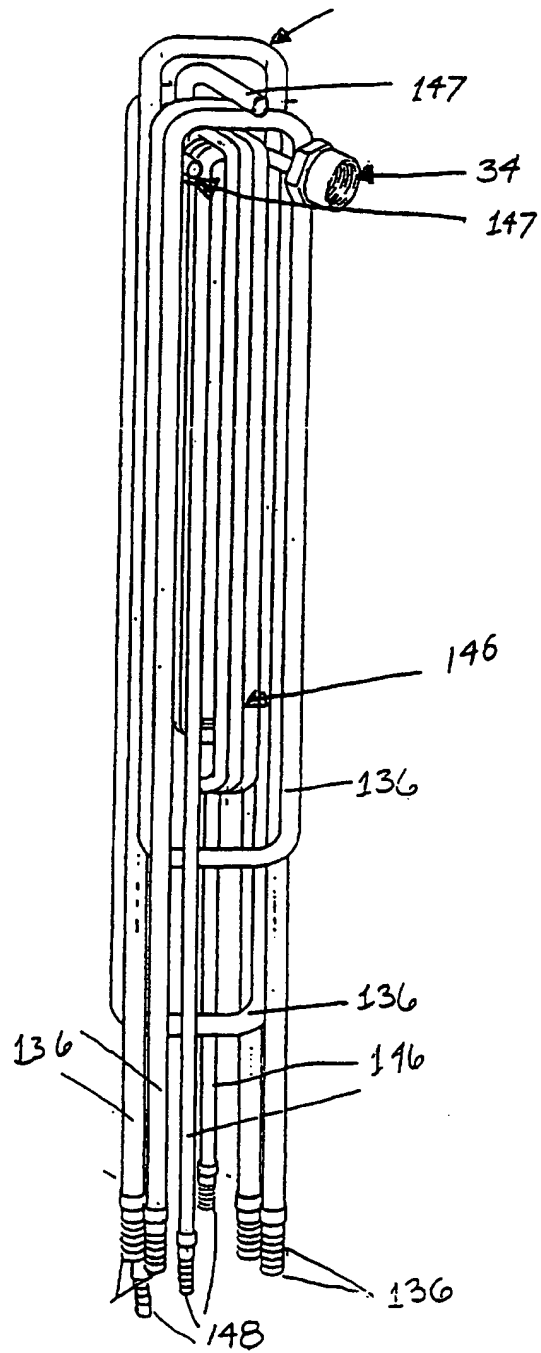

17/24

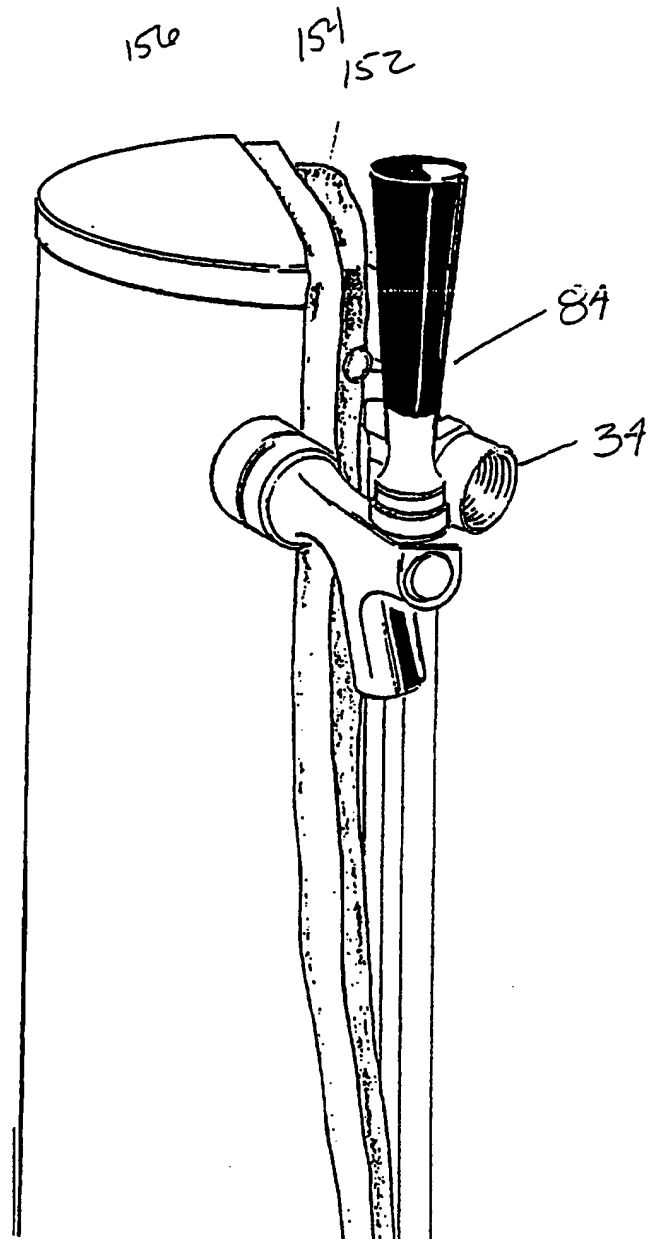


FIG. 15b

18/24

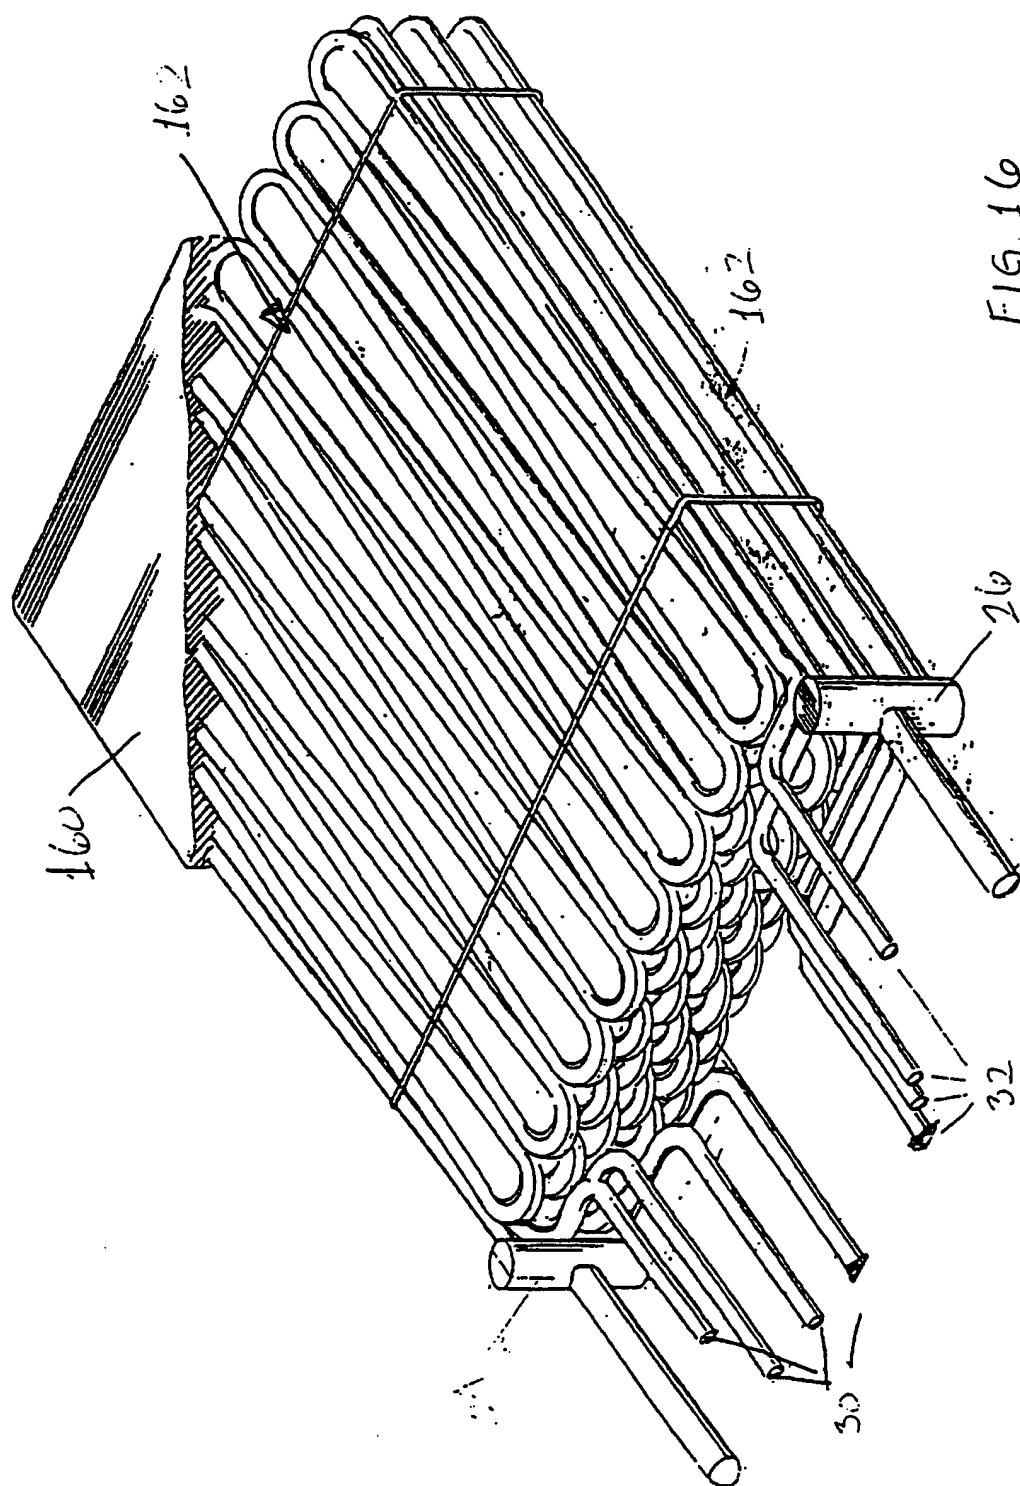


FIG. 16

19/24

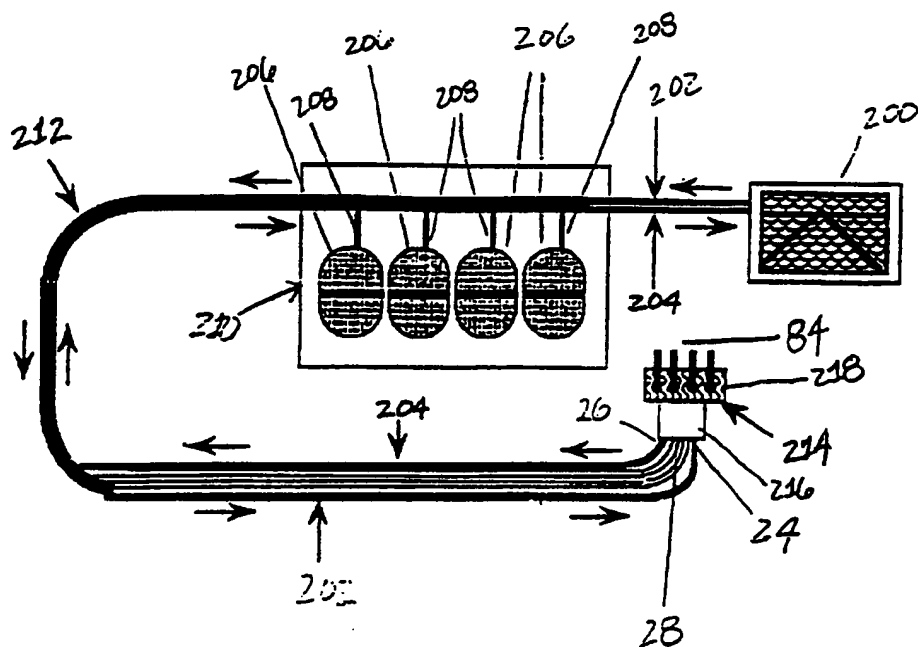


FIG. 17

20/24

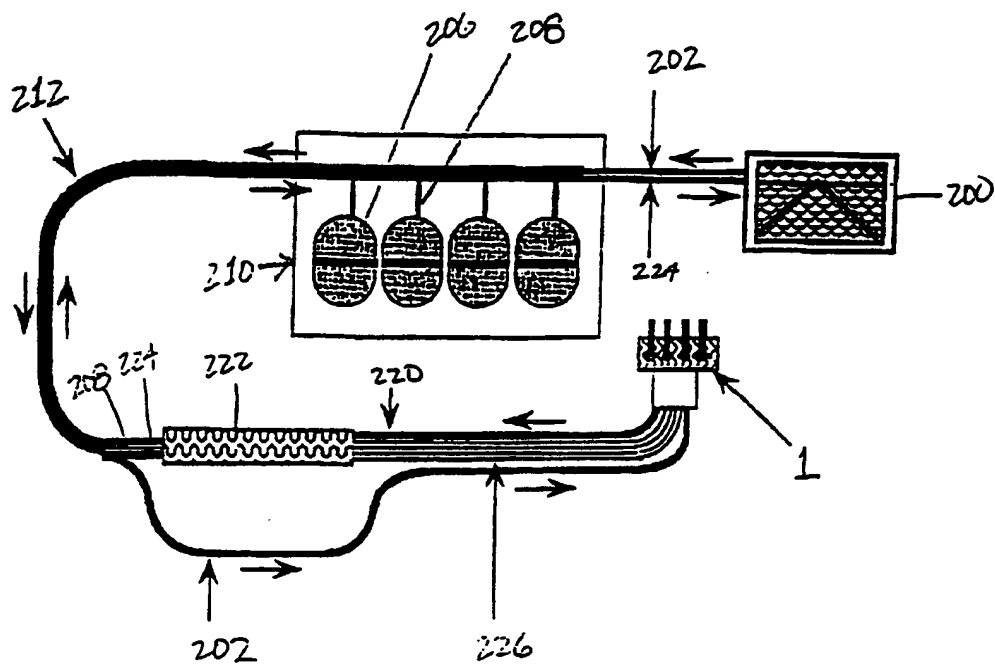


FIG. 18

21/24

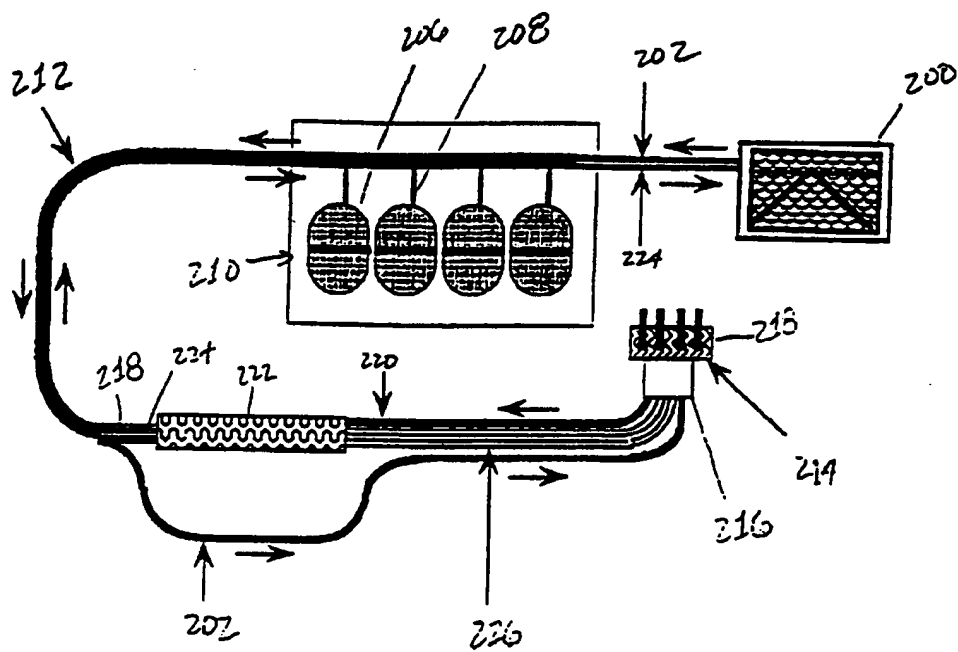


FIG. 19



22/24

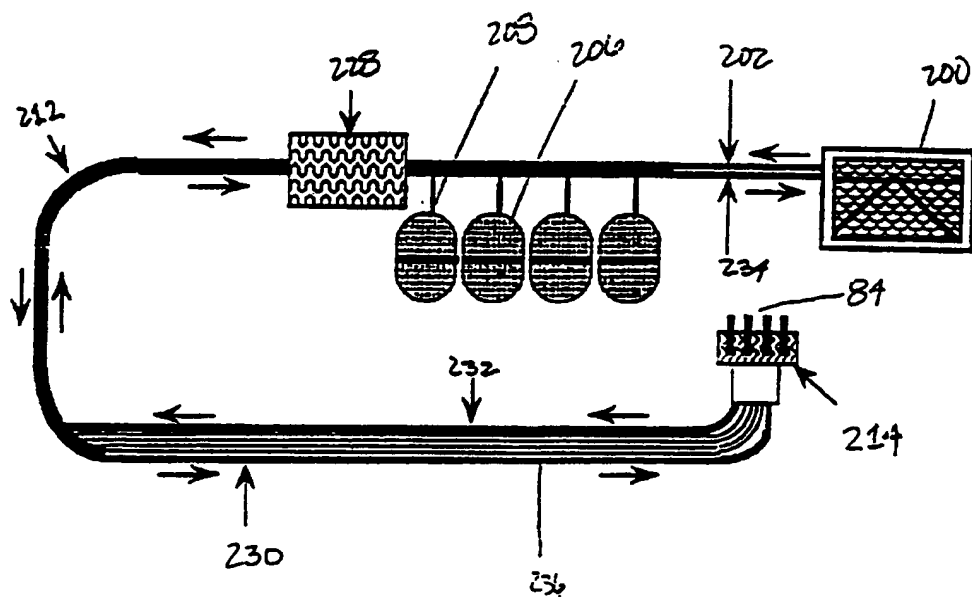


FIG. 20

23/24

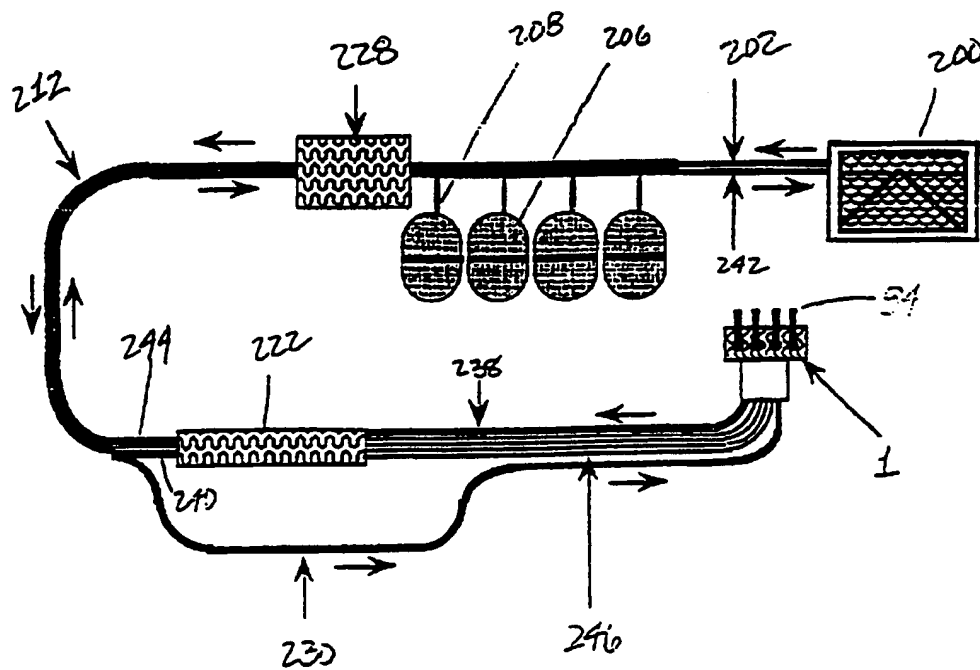


FIG. 21

24/24

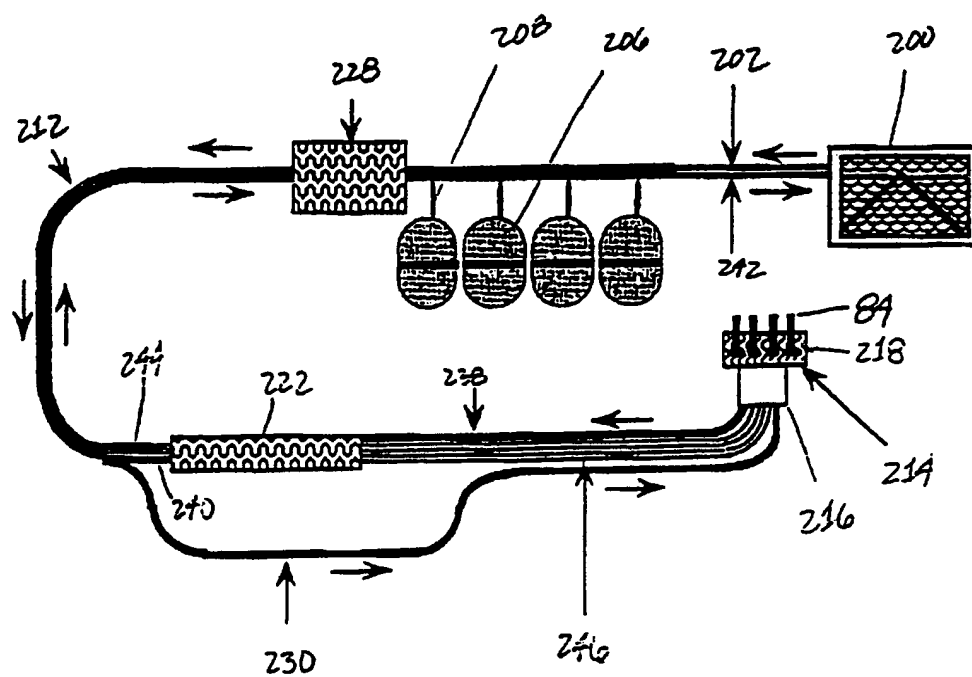


FIG. 22

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US96/14919

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>																										
IPC(6) :B67D 5/62 US CL :62/390, 434; 222/146.6; 165/144 According to International Patent Classification (IPC) or to both national classification and IPC																										
<b>B. FIELDS SEARCHED</b>																										
Minimum documentation searched (classification system followed by classification symbols) U.S. : 62/390, 434,98,398,393,396,430; 222/146.6; 165/144,137, Dig 455, Dig 458																										
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched None																										
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) None																										
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>																										
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																								
X ----	US 4,679,408 A (NELSON) 14 July 1987, see entire document.	33,34,36,37 -----																								
Y		23-32,35,38-39																								
Y	US 2,766,019 A (ADAMS et al) 09 October 1956, see entire document.	23-32, 38-39																								
Y	US 1,969,643 A (FUCHS et al) 07 August 1934, see entire document.	30-32,38																								
A	US 1,899,629 A (MORSE) 28 February 1933, see entire document.	1-39																								
A	US 2,771,752 A (TENNANT) 27 November 1956, see entire document.	1-39																								
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.																										
<table border="0"> <tr> <td colspan="2">* Special categories of cited documents:</td> <td>*T</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>*A*</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>*X*</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>*E*</td> <td>earlier document published on or after the international filing date</td> <td>*Y*</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>*L*</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>*Z*</td> <td>document member of the same patent family</td> </tr> <tr> <td>*O*</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td></td> <td></td> </tr> <tr> <td>*P*</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			* Special categories of cited documents:		*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	*A*	document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	*E*	earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	*L*	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z*	document member of the same patent family	*O*	document referring to an oral disclosure, use, exhibition or other means			*P*	document published prior to the international filing date but later than the priority date claimed		
* Special categories of cited documents:		*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																							
*A*	document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																							
*E*	earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																							
*L*	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z*	document member of the same patent family																							
*O*	document referring to an oral disclosure, use, exhibition or other means																									
*P*	document published prior to the international filing date but later than the priority date claimed																									
Date of the actual completion of the international search 30 DECEMBER 1996		Date of mailing of the international search report 30 JAN 1997																								
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer <i>Stacia Sineuk</i> WILLIAM C. DOERRLER Telephone No. (703) 308-0696 <i>for</i>																								

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**